

PDF Compressor Free Version

INNOVATIVE HYDRAULIC HOSE SOLUTIONS



PERETE
HydraulicPipeTechnology

www.perete.cn

PDF Compressor Free Version

应用：中压液压应用，包括移动，机床和农业应用，使用石油或水基液压油。

加固：一根高强度钢丝编织。

封面：黑色聚氯丁二烯

内胎：丁腈橡胶

温度范围：-40° C至100° C

Application : Medium pressure hydraulic applications including mobile, machine tool and agricultural applications, using petroleum or water based hydraulic fluids.

Reinforcement : One braid of high-tensile steel wire.

Cover : Black polychloroprene

Inner Tube : Nitrile

Temperature Range : -40°C to 100°C



SAE 100R1AT DIN EN 853 1SN HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD						
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
1SN-04	6	1/4	6.4	13.4	225	3625	1000	14500	100	0.21
1SN-05	8	5/16	7.9	15	215	3120	850	12325	115	0.24
1SN-06	10	3/8	9.5	17.4	180	2610	720	10440	130	0.33
1SN-08	12	1/2	12.7	20.6	160	2320	640	9280	180	0.41
1SN-10	16	5/8	15.9	23.7	130	1885	520	7540	200	0.45
1SN-12	20	3/4	19	27.7	105	1525	420	6090	240	0.58
1SN-16	25	1	25.4	35.6	88	1275	350	5075	300	0.88
1SN-20	32	1 1/4	31.8	43.5	63	915	250	3625	420	1.23
1SN-24	40	1 1/2	38.1	50.6	50	725	200	2900	500	1.51
1SN-32	50	2	50.8	64	40	580	160	2320	630	1.91

PDF Compressor Free Version

应用：中压液压应用，包括移动，机床和农业应用，使用石油或水基液压油。
加固：一根高强度钢丝编织。
封面：黑色聚氯乙烯
内胎：丁腈橡胶
温度范围：-40° C至100° C

Application : Medium pressure hydraulic applications including mobile, machine tool and agricultural applications, using petroleum or water based hydraulic fluids.
Reinforcement : One braid of high-tensile steel wire.
Cover : Black polychloroprene
Inner Tube : Nitrile
Temperature Range : -40°C to 100°C



SAE 100R1AT DIN EN 853 1SC HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD						
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
1SC-04	6	1/4	6.4	13.5	225	3625	900	13050	75	0.18
1SC-05	8	5/16	7.9	14.5	215	3120	860	12470	85	0.21
1SC-06	10	3/8	9.5	16.9	180	2610	720	10440	90	0.28
1SC-08	12	1/2	12.7	20.4	160	2320	640	9280	130	0.33
1SC-10	16	5/8	15.9	23	130	1885	520	7540	150	0.41
1SC-12	20	3/4	19	26.7	105	1525	420	6090	180	0.52
1SC-16	25	1	25.4	34.9	88	1270	352	5104	230	0.78

PDF Compressor Free Version

应用：高压液压油管路，用于建筑，机床和使用石油或水基液压油的农业应用。

加固：两根高强度钢丝编织带。

封面：黑色聚氯丁二烯

内胎：丁腈橡胶

温度范围：-40° C至100° C

Application : High pressure hydraulic oil lines used in construction, machine tool and agricultural applications using petroleum or water based hydraulic fluids.

Reinforcement : Two braids of high-tensile steel wire.

Cover : Black polychloroprene

Inner Tube : Nitrile

Temperature Range : -40°C to 100°C



SAE 100R1AT DIN EN 853 1SC HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD						
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
2SN-04	6	1/4	6.4	15	400	5805	1600	23200	100	0.33
2SN-05	8	5/16	7.9	16.6	350	5085	1400	20300	115	0.39
2SN-06	10	3/8	9.5	19	330	4790	1320	19140	130	0.5
2SN-08	12	1/2	12.7	22.2	275	3990	1100	15950	180	0.59
2SN-10	16	5/8	15.9	25.4	250	3625	1000	14500	200	0.71
2SN-12	20	3/4	19	29.3	215	3120	850	12325	240	0.86
2SN-16	25	1	25.4	38.1	165	2395	650	9425	300	1.28
2SN-20	32	1 1/4	31.8	48.3	125	1815	500	7250	420	2.02
2SN-24	40	1 1/2	38.1	54.6	90	1305	360	5220	500	2.23
2SN-32	50	2	50.8	67.3	80	1160	320	4640	630	2.85

PDF Compressor Free Version

应用：高压液压油管路，用于建筑，机床和使用石油或 水基液压油
的农业应用。
加固：两根高强度钢丝编织带。
封面：黑色聚氯丁二烯
内胎：丁腈橡胶
温度范围：-40° C至100° C



Application : High pressure hydraulic oil lines used in construction, machine tool and agricultural applications using petroleum or water based hydraulic fluids.

Reinforcement : Two braids of high-tensile steel wire.

Cover : Black polychloroprene

Inner Tube : Nitrile

Temperature Range : -40°Cto 100°C

SAE 100R2AT DIN EN 853 2SC HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RADIUS	AVERAGE WEIGHT
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
2SC-04	6	1/4	6.4	14.2	400	5805	1600	23200	75	0.28
2SC-05	8	5/16	7.9	16	350	5080	1400	20300	85	0.33
2SC-06	10	3/8	9.5	18.3	330	4790	1320	19140	90	0.42
2SC-08	12	1/2	12.7	21.5	275	3990	1100	15950	130	0.52
2SC-10	16	5/8	15.9	24.7	250	3625	1000	14500	170	0.61
2SC-12	20	3/4	19	28.6	215	3120	850	12325	200	0.79
2SC-16	25	1	25.4	36.6	165	2395	660	9570	250	1.1

PDF Compressor Free Version

应用：用于石油基液压油的超高压应用。
增强层：四层螺旋形高强度钢丝交替层。
封面：黑色聚氯丁二烯
内胎：聚氯丁二烯
温度范围：-40° C至100° C



Application : Very high pressure applications used for petroleum based hydraulic fluids.

Reinforcement : Four alternating layers of spiralled high-tensile steel wire.

Cover : Black polychloroprene

Inner Tube : Polychloroprene

Temperature Range : -40°C to 100°C

DIN EN 856 4SP HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD						
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
4SP-04	6	1/4	6.4	17.8	500	7250	2400	34800	150	0.7
4SP-06	10	3/8	9.5	21.4	445	6450	1780	25810	180	0.78
4SP-08	12	1/2	12.7	24.6	415	6000	1660	24070	230	0.93
4SP-10	16	5/8	15.9	28.2	350	5000	1400	20300	250	1.17
4SP-12	20	3/4	19	32.2	350	5000	1400	20300	300	1.48
4SP-16	25	1	25.4	39.7	280	4000	670	9715	340	2.02
4SP-32	32	1 1/4	31.8	50.8	210	3000	500	7250	460	3.05
4SP-24	40	1 1/2	38.1	57.2	185	2650	740	10730	560	3.52
4SP-32	50	2	50.8	69.8	165	2360	660	9570	660	5.2

PDF Compressor Free Version

应用：用于石油基液压油的极高压力，脉动应用。
增强层：四层螺旋形高强度钢丝交替层
封面：黑色聚氯丁二烯
内胎：聚氯丁二烯
温度范围：-40° C至100° C



Application : Very high pressure, pulsating applications used for petroleum based hydraulic fluids.
Reinforcement : Four alternating layers of spiralled high-tensile steel wire
Cover : Black polychloroprene
Inner Tube : Polychloroprene
Temperature Range : -40°C to 100°C

DIN EN 856 4SH HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RADIUS	AVERAGE WEIGHT
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
4SH-12	20	3/4	19	32.2	420	6095	1680	24360	280	1.53
4SH-16	25	1	25.4	38.7	380	5515	1520	22040	340	2.06
4SH-20	32	1 1/4	31.8	45.5	345	5000	1380	20010	460	2.46
4SH-24	40	1 1/2	38.1	53.5	290	4200	1160	16820	560	3.35
4SH-32	50	2	50.8	68.1	250	3625	1000	14500	700	4.55


应用：非常高压的应用受到浪涌或弯曲，如建筑设备，采矿和高性能工业市场。

增强层：四层螺旋形高强度钢丝交替层（尺寸为3/4" 和1" ）和六个交替的螺旋高强度钢丝层。

封面：黑色聚氯乙烯

内胎：聚氯乙烯

温度范围：-40° C至121° C

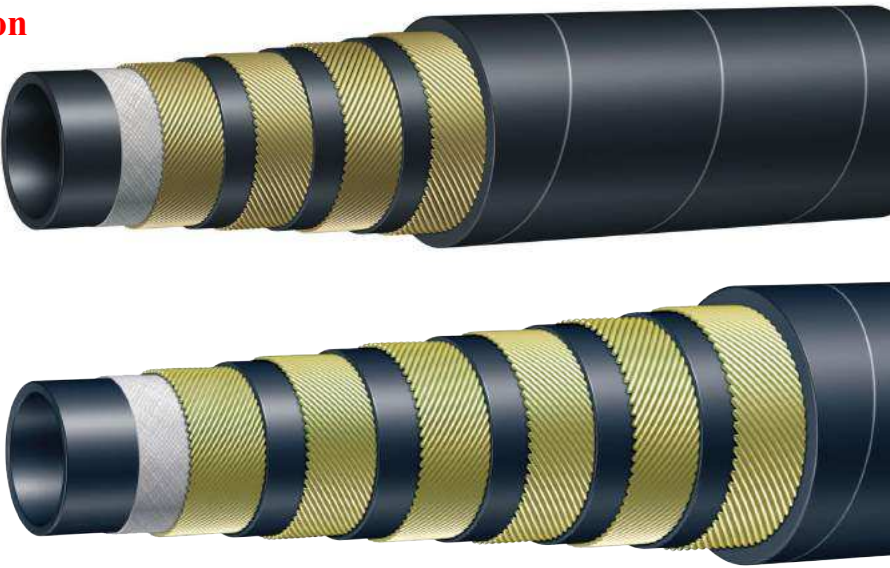

Application : Very high pressure applications subject to surges or flexing such as construction equipment, mining and the high-performance industrial market.

Reinforcement : Four alternating layers of spiralled high-tensile steel wire (sizes 3/4" and 1") and six alternating layers of spiralled high-tensile steel wire. **Cover** : Black polychloroprene


Inner Tube : Polychloroprene

Temperature Range : -40°C to 121°C

SAE 100 EN 856 R13 HYDRAULIC HOSE										
MODEL	HOSE SIZE		NOMINAL HOSE ID	NOMINAL HOSE OD	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RADIUS	AVERAGE WEIGHT
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
R13-12	20	3/4	19	32	350	5075	1400	20300	240	1.65
R13-16	25	1	25.4	39.2	350	5075	1400	20300	300	2.25
R13-20	32	1 1/4	31.8	49.8	350	5000	1400	20300	420	3.6
R13-24	40	1 1/2	38.1	57.3	350	5075	1400	20300	500	4.75
R13-32	50	2	50.8	71.9	350	5075	1400	20300	630	6.9

应用：非常高压的应用受到浪涌或弯曲，如建筑设备，采矿和
高性能工业市场。
增强层：四层螺旋形高强度钢丝交替层（尺寸为3/4" 和1" ）和六个交替的螺旋高强度钢丝层。
封面：黑色聚氯丁二烯
内胎：聚氯丁二烯
温度范围：-40° C至121° C

Application : Designed specifically to handle severe high pressure applications where pressure spikes or constant hydrostatic loads are present.
Reinforcement : Four alternating layers of spiralled high-tensile steel wire (sizes 1/2", 5/8", 3/4" and 1") and six alternating layers of spiralled high-tensile steel wire.
Cover : Black polychloroprene
Inner Tube : Polychloroprene
Temperature Range : -40°C to 121°C

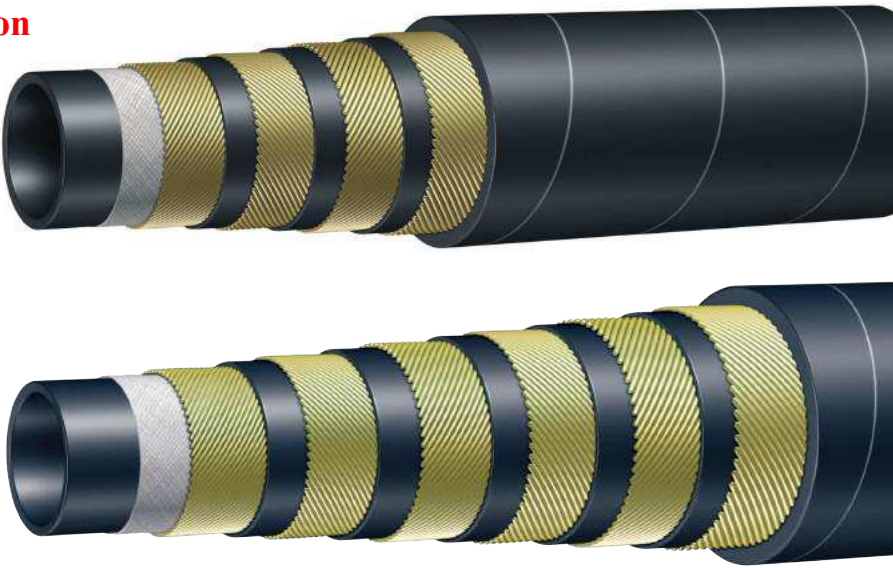

SAE 100 EN 856 R15 HYDRAULIC HOSE					 MAXIMUM WORKING PRESSURE		 MINIMUM BURST PRESSURE		 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
MODEL	HOSE		NOMINAL HOSE ID	NOMINAL HOSE OD	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RADIUS	AVERAGE WEIGHT
型号	通经		内径	外径	最高工作压力		爆破压力		最小弯曲 半径	重量
HOSE	DN	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
R15-12	20	3/4	19	32	420	6090	1680	24360	265	1.545
R15-16	25	1	25.4	38.4	400	5800	1600	23200	330	2.13
R15-20	32	1 1/4	31.8	49.3	420	6090	1680	24360	445	3.975
R15-24	40	1 1/2	38.1	57.3	420	6090	1680	24360	530	4.98
R15-32	50	2	50.8	72	414	6000	1655	24000	670	7.08

SAE 100 R14
管: 光滑的ptfe 高机械和抗振性, 低渗透性, 介电性, 耐性, 食品级 (FDA, DVGW BFR兼容)。 化学惰性, 不粘, 臭氧和耐候性。
加固: 高强度不锈钢编织AISI 304。
应用: 压缩空气, 燃气, 蒸汽, 燃料, 石油, 化学品和医药产品, 特别适用于蒸汽管道
注塑机, 导热油装置, 充电低温气体管线, 压缩机排气管线, 汽车, 制药和食品部门。 溶剂, 颜料和油漆转移线。 液压管线用于动力驱动船舶应用。在高温下不适合熔融的碱金属和卤素。
温度: -60° C + 260° C (-76° F + 500° F)

SAE 100 R14
Tube: smooth ptfe - high mechanical and vibration resistance, low permeability, dielectrical, fire resistant, food grade(FDA, DVGW, BFRcompliant). Chemically inert, non sticking, ozone and weather resistant.
Reinforcement: high tensile stainless steel braid AISI 304.
Application: compressed air, gas, steam, fuel, oil, chemical and pharmaceutical products, particularly suitable for steam piping on injection moulding machines, diathermic oil installations, charging lines for cryogenic gas, compressor discharge lines, automotive, pharmaceutical and food sectors. Solvents, pigments and paint transfer lines. Hydraulic lines in power steering marine applications.
Not suitable for molten alkali metals and halogens at high temperature.
Temperature: -60 °C+260 °C(-76 °F+500 °F)



R14 PTFE HOSE MODEL	 NOMINAL HOSE ID	 NOMINAL HOSE OD	 MAXIMUM WORKING PRESSURE	 MINIMUM BURST PRESSURE	 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
软管代码	软管内径 mm	软管外径 mm	最大工作 压力 Mpa	最低爆破压力 Mpa	最小弯曲 半径 mm	配用套筒
R14-03	5.1	8	26.4	79.3	63	00TF0-03
R14-04	6.7	9	22.4	67.2	76	00TF0-04
R14-05	8.4	11	20.7	62.1	101	00TF0-05
R14-06	9.5	13	23	69	127	00TF0-06
R14-08	13.4	17	16.1	48.3	152	00TF0-08
R14-10	16.6	20	11	34.5	178	00TF0-10
R14-12	19.8	23	10.3	31	203	00TF0-12
R14-16	26.1	30	8	24.1	305	00TF0-16

SAE 100 BR14 PDF Compressor Free Version

管：螺旋形旋转的ptfe - 高机械强度和振动阻力，低渗透性，绝缘，耐火，食品级（FDA，DVGW 符合BFR）。化学惰性，不粘，臭氧和耐候性。

加固：高强度不锈钢编织AISI 304。

应用：压缩空气，燃气，蒸汽，燃料，石油，化学品和医药产品，特别适用于蒸汽管道注塑机，导热油装置，充电压缩气体管线，压缩机排气管，汽车，制药和食品部门。溶剂，颜料和油漆转移线。液压管线用于动力驱动船舶应用。

在高温下不适合熔融的碱金属和卤素。

温度：-60° C + 260° C (-76° F + 500° F)



SAE 100 BR14

Tube: helically convoluted ptfe - high mechanical and vibration resistance, low permeability, dielectrical, fire resistant, food grade (FDA, DVGW, BFR compliant). Chemically inert, non sticking, ozone and weather resistant.

Reinforcement: high tensile stainless steel braid AISI 304.

Application: compressed air, gas, steam, fuel, oil, chemical and pharmaceutical products, particularly suitable for steam piping on injection moulding machines, diathermic oil installations, charging lines for cryogenic gas, compressor discharge lines, automotive, pharmaceutical and food sectors. Solvents, pigments and paint transfer lines. Hydraulic lines in power steering marine applications.














Not suitable for molten alkali metals and halogens at high temperature.

Temperature: -60 °C +260 °C (-76 °F +500 °F)










BR14 PTFE HOSE MODEL	 NOMINAL HOSE ID	 NOMINAL HOSE OD	 MAXIMUM WORKING PRESSURE	 MINIMUM BURST PRESSURE	 MINIMUM BEND RADIUS	 AVERAGE WEIGHT
软管代码	软管内径 mm	软管外径 mm	最大工作 压力 Mpa	最低爆破压力 Mpa	最小弯曲 半径 mm	配用套筒
BR14-06	9.5	15.6	6.9	27.6	25.4	00710-06
BR14-08	12.7	19.9	8.6	34.5	38	00710-08
BR14-10	16	23	9.6	38.6	50	00710-10
BR14-12	19.1	26.7	7.6	30.3	63	00710-12
BR14-16	25.4	32.3	6.9	27.6	76	00710-16
BR14-20	31.8	39.9	6.9	27.6	88.9	00710-20
BR14-24	38.1	46	5.2	20.7	114	00710-24
BR14-32	50.8	58.9	3.4	13.6	133	00710-32

PDF Compressor Free Version









DIN - 公制

CA A-57  24°锥内螺纹 - 轻系列 - O形圈 - 直接头	CE A-58  24°锥内螺纹 - 轻系列 - O形圈 - 45°接头	CF A-59  24°锥内螺纹 - 轻系列 - O形圈 - 90°接头	D0 A-59  24°锥外螺纹 - 轻系列 - 直接头	C3 A-60  公制内螺纹 - 轻系列 - 直接头(球头)	C4 A-60  公制内螺纹 - 轻系列 - 45°接头(球头)
C5 A-61  公制内螺纹 - 轻系列 - 90°接头(球头)	C9 A-61  24°锥内螺纹 - 重系列 - O形圈 - 直接头	0C A-62  24°锥内螺纹 - 重系列 - O形圈 - 45°接头	1C A-62  24°锥内螺纹 - 重系列 - O形圈 - 90°接头	D2 A-63  24°锥外螺纹 - 重系列 - 直接头	C6 A-63  公制内螺纹 - 重系列 - 直接头(球头)
49 A-64  公制铰接 - 直接头					






法兰

15 A-65  SAE 61系列 - 直法兰接头	16 A-65  SAE 61系列 - 22.5°法兰接头	26 A-65  SAE 61系列 - 30°法兰接头	17 A-66  SAE 61系列 - 45°法兰接头	27 A-66  SAE 61系列 - 60°法兰接头	18 A-66  SAE 61系列 - 67.5°法兰接头
19 A-67  SAE 61系列 - 90°法兰接头	6A A-67  SAE 62系列 - 直法兰接头	6F A-67  SAE 62系列 - 45°法兰接头	6N A-68  SAE 62系列 - 90°法兰接头		













ORFSPDF Compressor Free Version

J0 A-68  ORFS外螺纹带O形圈 - 直接头	JB A-68  ORFS外螺纹带O形圈 - 隔板式 - 直接头	JC A-69  ORFS内螺纹 - 直接头 - 短型	JS A-69  ORFS内螺纹 - 直接头 - 加长型	J7 A-69  ORFS内螺纹 - 45°接头	J9 A-70  ORFS内螺纹 - 90°接头 - 短型
J5 A-70  ORFS内螺纹 - 90°接头 - 中型	J1 A-70  ORFS内螺纹 - 90°接头 - 加长型				










BSP

92 A-71  BSPP内螺纹 - 60°锥 - 直接头	B1 A-71  BSPP内螺纹 - 60°锥 - 45°接头	B2 A-72  BSPP内螺纹 - 60°锥 - 90°接头	B4 A-72  BSPP内螺纹 - 60°锥 - 90°接头(紧凑型)	D9 A-72  BSPP外螺纹 - 60°锥 - 直接头
--	---	---	--	--






SAE

01 A-73  NPTF外螺纹 - 直接头	13 A-73  NPTF外螺纹 - 旋转螺母 - 直接头	1L A-74  NPTF外螺纹 - 旋转螺母 - 90°接头	02 A-74  NPTF内螺纹 - 直接头	S2 A-74  NPTF内螺纹 - 旋转螺母 - 直接头	07 A-74  NPSM内螺纹 - 旋转螺母 - 60°锥 - 直接头
03 A-75  JIC 37°锥外螺纹 - 直接头	LB A-75  JIC 37°锥外螺纹 - 隔板式 - 直接头	06 A-75  JIC 37°锥内螺纹 - 直接头	37 A-76  JIC 37°锥内螺纹 - 45°接头 - 短型	L7 A-76  JIC 37°锥内螺纹 - 45°接头 - 中型	39 A-76  JIC 37°锥内螺纹 - 90°接头 - 短型




PDF Compressor Free Version

L9 A-77  JIC 37°锥内螺纹 - 90°接头 - 中型	41 A-77  JIC 37°锥内螺纹 - 90°接头 - 加长型	4V A-77  JIC 37°锥内螺纹 - 150°接头	04 A-78  SAE 45°锥外螺纹 - 直接头	08 A-78  SAE 45°锥内螺纹 - 直接头	77 A-78  SAE 45°锥内螺纹 - 45°接头
79 A-78  SAE 45°锥内螺纹 - 90°接头	05 A-79  SAE外螺纹带O形圈 - 直接头	0G A-79  SAE外螺纹带O形圈 - 旋转螺母 - 直接头	0L A-79  SAE外螺纹带O形圈 - 旋转螺母 - 90°接头		

JIS


FU A-80  BSPP内螺纹 - 30°扩口 - 直接头	GU A-80  BSPP内螺纹 - 60°锥 - 直接头	UT A-80  BSPP外螺纹 - 60°锥 - 直接头	MU A-81  公制内螺纹 - 30°扩口 - 直接头	XU A-81  公制内螺纹 - 30°扩口 - 直接头
--	---	---	--	--

UPTC

EN A-82  UPTC外接头 - 直接头	EU A-82  UPTC外接头 - 45°接头	ET A-82  UPTC外接头 - 90°接头
--	--	--

PDF Compressor Free Version


1CA43
公制24°锥内螺纹带O形圈 - 轻系列 - 直接头
ISO 12151-2-SWS-L - DKOL

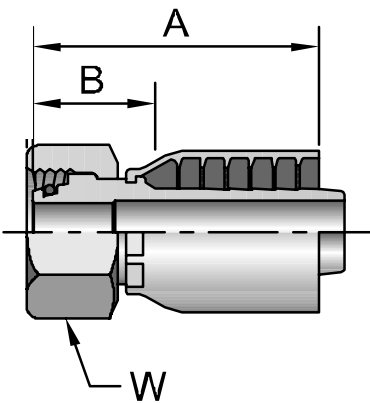

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1CA43-6-4	6	M12x1.5	6	1/4	44	22	14
1CA43-8-4	8	M14x1.5	6	1/4	44	22	17
1CA43-8-5	8	M14x1.5	8	5/16	50	26	17
1CA43-10-4	10	M16x1.5	6	1/4	46	22	19
1CA43-10-5	10	M16x1.5	8	5/16	46	22	19
1CA43-10-6	10	M16x1.5	10	3/8	53	27	19
1CA43-12-5	12	M18x1.5	8	5/16	46	22	22
1CA43-12-6	12	M18x1.5	10	3/8	48	22	22
1CA43-12-8	12	M18x1.5	12	1/2	55	23	22
1CA43-15-6	15	M22x1.5	10	3/8	52	22	27
1CA43-15-8	15	M22x1.5	12	1/2	56	27	27
1CA43-15-10	15	M22x1.5	16	5/8	67	27	27
1CA43-18-8	18	M26x1.5	12	1/2	53	22	32
1CA43-18-10	18	M26x1.5	16	5/8	62	26	32
1CA43-18-12	18	M26x1.5	20	3/4	65	26	32
1CA43-22-10	22	M30x2	16	5/8	64	27	36
1CA43-22-12	22	M30x2	20	3/4	63	24	36
1CA43-28-12	28	M36x2	20	3/4	65	26	41
1CA43-28-16	28	M36x2	25	1	78	33	41
1CA43-28-20	28	M36x2	32	1-1/4	81	34	41
1CA43-35-16	35	M45x2	25	1	76	36	50
1CA43-35-20	35	M45x2	32	1-1/4	82	35	50
1CA43-42-24	42	M52x2	40	1-1/2	77	39	60

PDF Compressor Free Version

1CE43
公制24°锥内螺纹带O形圈 - 轻系列 - 45°接头
ISO 12151-2-SWE45°-L - DKOL 45°

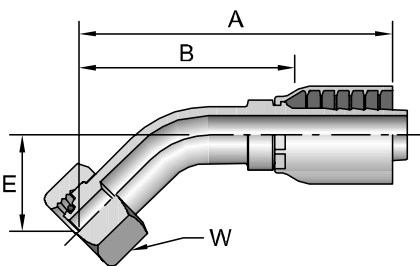


# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
1CE43-6-4	6	M12x1.5	6	1/4	68	45	19	14
1CE43-8-4	8	M14x1.5	6	1/4	59	35	16	17
1CE43-8-5	8	M14x1.5	8	5/16	64	40	19	17
1CE43-10-4	10	M16x1.5	6	1/4	58	36	17	19
1CE43-10-5	10	M16x1.5	8	5/16	67	43	15	19
1CE43-10-6	10	M16x1.5	10	3/8	75	47	19	19
1CE43-12-6	12	M18x1.5	10	3/8	69	39	19	22
1CE43-12-8	12	M18x1.5	12	1/2	82	50	23	22
1CE43-15-8	15	M22x1.5	12	1/2	81	46	22	27
1CE43-15-10	15	M22x1.5	16	5/8	91	52	26	27
1CE43-18-8	18	M26x1.5	12	1/2	79	47	22	32
1CE43-18-10	18	M26x1.5	16	5/8	89	49	23	32
1CE43-18-12	18	M26x1.5	20	3/4	103	64	28	32
1CE43-22-10	22	M30x2	16	5/8	96	57	24	36
1CE43-22-12	22	M30x2	20	3/4	98	58	26	36
1CE43-28-16	28	M36x2	25	1	125	84	34	41
1CE43-35-20	35	M45x2	32	1-1/4	144	97	41	50
1CE43-42-24	42	M52x2	40	1-1/2	155	117	49	60

PDF Compressor Free Version

1CF43

公制24°锥内螺纹带O形圈 - 轻系列 - 90°接头


ISO 12151-2-SWE90°-L - DKOL 90°

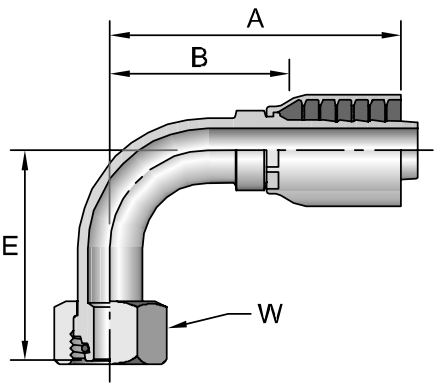

# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
1CF43-6-4	6	M12x1.5	6	1/4	55	33	33	14
1CF43-8-4	8	M14x1.5	6	1/4	51	28	29	17
1CF43-8-5	8	M14x1.5	8	5/16	55	31	35	17
1CF43-10-4	10	M16x1.5	6	1/4	52	28	29	19
1CF43-10-5	10	M16x1.5	8	5/16	61	37	29	19
1CF43-10-6	10	M16x1.5	10	3/8	65	37	35	19
1CF43-12-5	12	M18x1.5	8	5/16	61	37	30	22
1CF43-12-6	12	M18x1.5	10	3/8	64	35	36	22
1CF43-12-8	12	M18x1.5	12	1/2	68	36	43	22
1CF43-15-6	15	M22x1.5	10	3/8	67	38	38	27
1CF43-15-8	15	M22x1.5	12	1/2	89	37	43	27
1CF43-15-10	15	M22x1.5	16	5/8	79	42	50	27
1CF43-18-8	18	M26x1.5	12	1/2	71	36	41	32
1CF43-18-10	18	M26x1.5	16	5/8	81	41	45	32
1CF43-18-12	18	M26x1.5	20	3/4	89	50	56	32
1CF43-22-10	22	M30x2	16	5/8	81	42	47	36
1CF43-22-12	22	M30x2	20	3/4	89	49	55	36
1CF43-28-16	28	M36x2	25	1	113	72	78	41
1CF43-35-20	35	M45x2	32	1-1/4	130	83	79	50
1CF43-42-24	42	M52x2	40	1-1/2	139	101	101	60

PDF Compressor Free Version


1D043
公制24°锥外螺纹 - 轻系列 - 直接头
ISO 12151-2-S-L - CEL

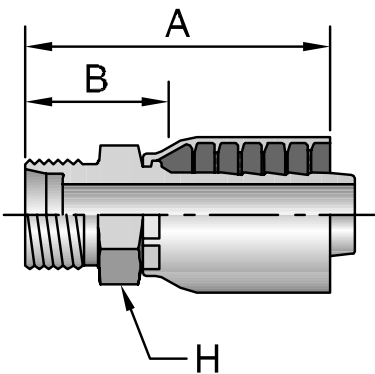

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1D043-6-4	6	M12x1.5	6	1/4	44	24	14
1D043-8-4	8	M14x1.5	6	1/4	41	24	14
1D043-10-5	10	M16x1.5	8	5/16	50	21	19
1D043-10-6	10	M16x1.5	10	3/8	50	21	19
1D043-12-5	12	M18x1.5	8	5/16	48	24	19
1D043-12-6	12	M18x1.5	10	3/8	50	21	19
1D043-15-6	15	M22x1.5	10	3/8	49	26	22
1D043-15-8	15	M22x1.5	12	1/2	58	24	22
1D043-18-10	18	M26x1.5	16	5/8	68	29	27
1D043-18-12	18	M26x1.5	20	3/4	68	29	27
1D043-22-12	22	M30x2	20	3/4	69	31	30
1D043-28-16	28	M36x2	25	1	79	33	36
1D043-35-20	35	M45x2	32	1-1/4	85	38	46

PDF Compressor Free Version


1C343
公制内螺纹 - 轻系列 - 直接头（球头）
DKL

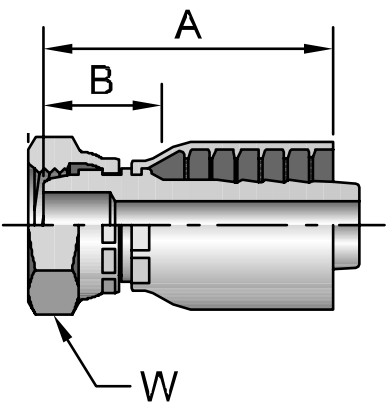

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1C343-6-4	6	M12x1.5	6	1/4	44	29	14
1C343-8-4	8	M14x1.5	6	1/4	45	29	17
1C343-10-5	10	M16x1.5	8	5/16	51	30	19
1C343-10-6	10	M16x1.5	10	3/8	52	28	19
1C343-12-5	12	M18x1.5	8	5/16	47	18	22
1C343-12-6	12	M18x1.5	10	3/8	57	30	22
1C343-15-6	15	M22x1.5	10	3/8	47	18	27
1C343-15-8	15	M22x1.5	12	1/2	61	33	27
1C343-18-10	18	M26x1.5	16	5/8	67	31	32
1C343-18-12	18	M26x1.5	20	3/4	71	35	32
1C343-22-12	22	M30x2	20	3/4	73	36	36
1C343-28-16	28	M36x2	25	1	85	45	46

PDF Compressor Free Version


1C443
公制内螺纹 - 轻系列 - 45°接头（球头）
DKL 45°

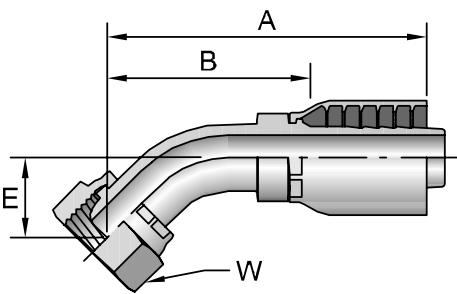

# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
1C443-8-4	8	M14x1.5	6	1/4	61	38	15	17
1C443-10-5	10	M16x1.5	8	5/16	66	41	17	19
1C443-10-6	10	M16x1.5	10	3/8	70	41	17	19
1C443-12-6	12	M18x1.5	10	3/8	70	41	17	22
1C443-15-8	15	M22x1.5	12	1/2	85	50	20	27
1C443-18-10	18	M26x1.5	16	5/8	104	64	29	32
1C443-22-12	22	M30x2	20	3/4	96	56	23	36
1C443-28-16	28	M36x2	25	1	115	71	28	46

PDF Compressor Free Version


1C543
公制内螺纹 - 轻系列 - 90°接头（球头）
DKL 90°

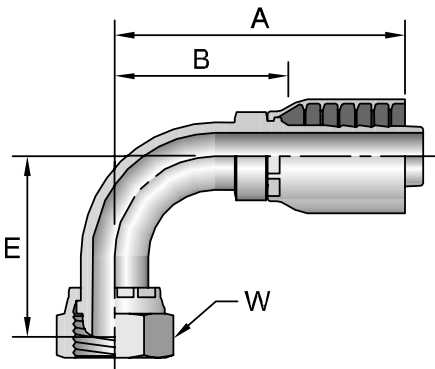

# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
1C543-8-4	8	M14x1.5	6	1/4	52	30	28	17
1C543-10-5	10	M16x1.5	8	5/16	56	31	30	19
1C543-10-6	10	M16x1.5	10	3/8	61	36	30	19
1C543-12-6	12	M18x1.5	10	3/8	61	36	31	22
1C543-15-8	15	M22x1.5	12	1/2	75	40	40	27
1C543-18-10	18	M26x1.5	16	5/8	91	52	60	32
1C543-22-12	22	M30x2	20	3/4	91	51	50	36
1C543-28-16	28	M36x2	25	1	110	65	63	46

PDF Compressor Free Version


1C943
公制24°锥内螺纹带O形圈 - 重系列 - 直接头
ISO 12151-2-SWS-S – DKOS

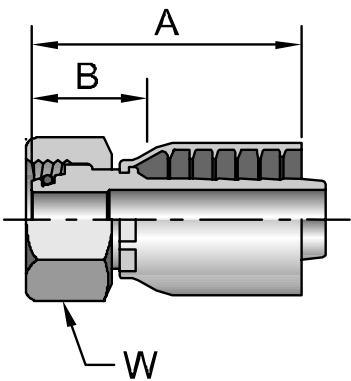

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1C943-6-4	6	M14x1.5	6	1/4	48	26	17
1C943-8-4	8	M16x1.5	6	1/4	45	23	19
1C943-8-6	8	M16x1.5	10	3/8	87	23	19
1C943-10-4	10	M18x1.5	6	1/4	46	22	22
1C943-10-5	10	M18x1.5	8	5/16	47	22	22
1C943-10-6	10	M18x1.5	10	3/8	50	21	22
1C943-12-4	12	M20x1.5	6	1/4	45	23	24
1C943-12-5	12	M20x1.5	8	5/16	48	24	24
1C943-12-6	12	M20x1.5	10	3/8	52	22	24
1C943-12-8	12	M20x1.5	12	1/2	60	21	24
1C943-14-6	14	M22x1.5	10	3/8	50	21	27
1C943-16-8	16	M24x1.5	12	1/2	56	24	30
1C943-16-10	16	M24x1.5	16	5/8	66	29	30
1C943-16-12	16	M24x1.5	20	3/4	66	27	30
1C943-20-10	20	M30x2	16	5/8	66	27	36
1C943-20-12	20	M30x2	20	3/4	66	27	36
1C943-25-12	25	M36x2	20	3/4	68	28	46
1C943-25-16	25	M36x2	25	1	78	33	46
1C943-30-16	30	M42x2	25	1	77	32	50
1C943-38-20	38	M52x2	32	1-1/4	80	33	60
1C943-38-24	38	M52x2	40	1-1/2	78	40	60

PDF Compressor Free Version

10C43
公制24°锥内螺纹带O形圈 - 重系列 - 45°接头
ISO 12151-2 - SWE 45°-S - DKOS 45°

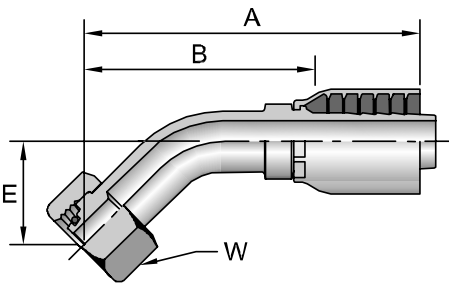


# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
10C43-8-4	8	M16x1.5	6	1/4	59	35	16	19
10C43-10-4	10	M18x1.5	6	1/4	59	36	16	22
10C43-12-5	12	M20x1.5	8	5/16	71	47	17	24
10C43-12-6	12	M20x1.5	10	3/8	69	40	20	24
10C43-14-6	14	M22x1.5	10	3/8	76	50	20	27
10C43-16-8	16	M24x1.5	12	1/2	82	48	24	30
10C43-20-10	20	M30x2	16	5/8	91	52	25	36
10C43-20-12	20	M30x2	20	3/4	100	60	29	36
10C43-25-12	25	M36x2	20	3/4	101	61	30	46
10C43-25-16	25	M36x2	25	1	122	81	33	46
10C43-30-16	30	M42x2	25	1	126	79	36	50
10C43-38-20*	38	M52x2	32	1-1/4	142	95	38	60

*必须使用PK2扣压，模具： 83C-A20H

PDF Compressor Free Version

11C43
公制24°锥内螺纹带O形圈 - 重系列 - 90°接头
ISO 12151-2 - SWE 90°-S - DKOS 90°

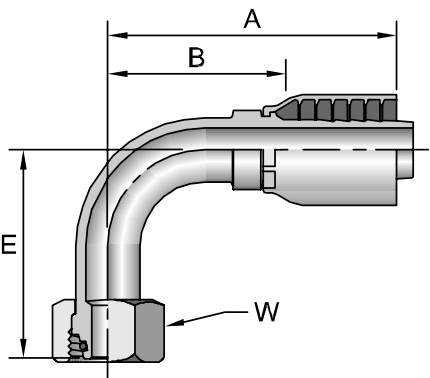


# 型号	 螺纹 公制		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
11C43-8-4	8	M16x1.5	6	1/4	48	26	29	19
11C43-10-4	10	M18x1.5	6	1/4	50	26	29	22
11C43-12-5	12	M20x1.5	8	5/16	60	36	32	24
11C43-12-6	12	M20x1.5	10	3/8	65	35	37	24
11C43-14-6	14	M22x1.5	10	3/8	65	35	37	27
11C43-16-8	16	M24x1.5	12	1/2	72	37	45	30
11C43-16-10	16	M24x1.5	16	5/8	79	40	45	30
11C43-20-10	20	M30x2	16	5/8	79	40	48	36
11C43-20-12	20	M30x2	20	3/4	89	53	58	36
11C43-25-12	25	M36x2	20	3/4	89	49	59	46
11C43-25-16	25	M36x2	25	1	109	68	69	46
11C43-30-16	30	M42x2	25	1	115	68	76	50
11C43-38-20*	38	M52x2	32	1-1/4	130	83	80	60

*必须使用PK2扣压，模具： 83C-A20H

PDF Compressor Free Version


1D243
公制24°锥外螺纹 - 重系列 - 直接头
ISO 12151-2-S-S - CES

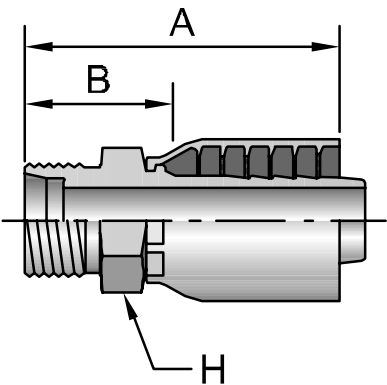

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1D243-8-4	8	M16x1.5	6	1/4	44	22	17
1D243-10-4	10	M18x1.5	6	1/4	44	22	19
1D243-12-5	12	M20x1.5	8	5/16	56	33	22
1D243-12-6	12	M20x1.5	10	3/8	50	26	22
1D243-14-6	14	M22x1.5	10	3/8	55	25	22
1D243-16-8	16	M24x1.5	12	1/2	60	30	24
1D243-20-10	20	M30x2	16	5/8	75	37	30
1D243-25-12	25	M36x2	20	3/4	73	33	36
1D243-30-16	30	M42x2	25	1	86	39	46
1D243-38-20	38	M52x2	32	1-1/4	91	48	55

PDF Compressor Free Version


1C643
公制内螺纹 - 重系列 - 直接头（球头）
DKS

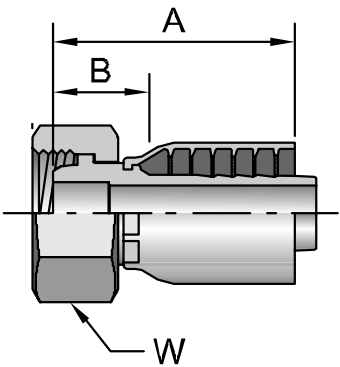

# 型号	 螺纹 公制		软管内径 I.D.		A	B	 W
			DN	inch	mm	mm	mm
1C643-8-4	8	M16x1.5	6	1/4	40	30	19
1C643-10-4	10	M18x1.5	6	1/4	41	30	22
1C643-12-5	12	M20x1.5	8	5/16	47	30	24
1C643-12-6	12	M20x1.5	10	3/8	45	34	24
1C643-12-8	12	M20x1.5	12	1/2	55	33	24
1C643-14-6	14	M22x1.5	10	3/8	49	34	27
1C643-16-8	16	M24x1.5	12	1/2	54	35	30
1C643-20-10	20	M30x2	16	5/8	60	35	36
1C643-20-12	20	M30x2	20	3/4	62	37	40
1C643-25-12	25	M36x2	20	3/4	63	40	46
1C643-30-16	30	M42x2	25	1	73	50	50


PDF Compressor Free Version

14943
公制铰接 - 直接头
DIN 7642

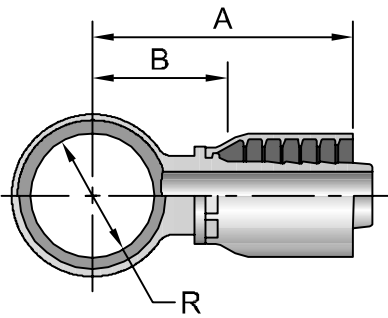

# 型号	R mm	软管内径 I.D.		A mm	B mm
		DN	inch		
14943-10-4	10	6	1/4	47	24
14943-12-4	12	6	1/4	47	25
14943-14-5	14	8	5/16	51	27
14943-16-6	16	10	3/8	58	29
14943-18-8	18	12	1/2	66	31
14943-22-10	22	16	5/8	74	35
14943-26-12	26	20	3/4	78	39

AM
铰接接头芯 - 公制螺纹
DKS

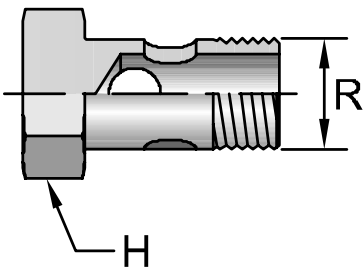


# 型号	R/螺纹 公制		H mm	铜垫片 2
AM-04	10	M10x1	14	853009-10
AM-06	12	M12x1.5	17	853009-12
AM-08	14	M14x1.5	19	853009-14
AM-10	16	M16x1.5	22	853009-16
AM-13	18	M18x1.5	24	853009-18
AM-16	22	M22x1.5	27	853009-22
AM-20	26	M26x1.5	32	853009-26
AM-30	30	M30x1.5	36	853009-30

每个铰接接头芯需要两个铜垫片。铜垫片需单独订购。

PDF Compressor Free Version

11543
SAE 61系列 - 直法兰接头
ISO 12151-3-S-L - SFL / 3000 psi

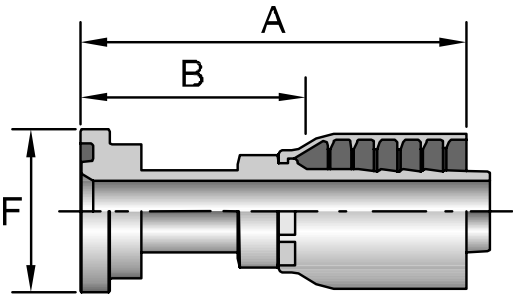


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	F mm
		DN	inch			
11543-8-8	1/2	12	1/2	88	56	30
11543-10-10	5/8	16	5/8	96	59	34
11543-12-8	3/4	12	1/2	62.5	31	38
11543-12-10	3/4	16	5/8	69	32	38
11543-12-12	3/4	20	3/4	90	62	38
11543-16-12	1	20	3/4	70	33	45
11543-16-16	1	25	1	108	67	45
11543-20-16	1-1/4	25	1	81	40	51
11543-20-20	1-1/4	32	1-1/4	119	76	51
11543-24-20	1-1/2	32	1-1/4	82	39	60
11543-24-24	1-1/2	40	1-1/2	117	82	60
11543-32-20	2	32	1-1/4	109	66	71
11543-32-24	2	40	1-1/2	80	45	71
11543-32-32	2	50	2	127	82	71

PDF Compressor Free Version

11643

SAE 61系列 - 22.5°法兰接头

ISO 12151-3 - E22 - L / 3000 psi

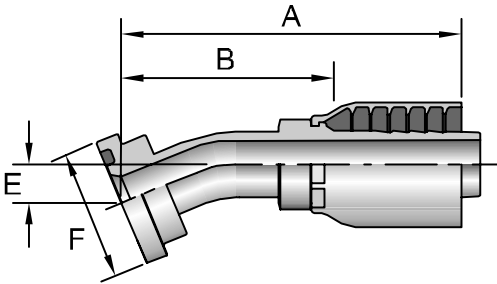


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
11643-12-12	3/4	20	3/4	99	63	11	38
11643-16-12	1	20	3/4	99	62	11	45
11643-16-16	1	25	1	108	68	11	45
11643-20-16	1-1/4	25	1	108	68	11	51
11643-20-20	1-1/4	32	1-1/4	118	76	13	51
11643-24-20	1-1/2	32	1-1/4	118	76	13	60

12643

SAE 61系列 - 30°法兰接头

ISO 12151-3 - E30 - L / 3000 psi

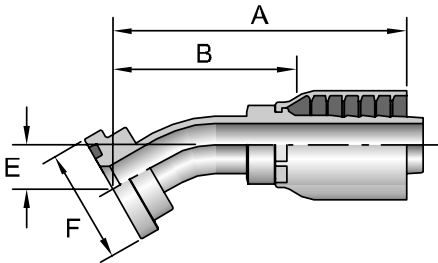


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
12643-12-12	3/4	20	3/4	99	62	15	38
12643-16-16	1	25	1	111	70	16	45
12643-20-16	1-1/4	25	1	111	70	16	51
12643-20-20	1-1/4	32	1-1/4	112	69	18	51

PDF Compressor Free Version

11743

SAE 61系列 - 45°法兰


ISO 12151-3 - E45 - L - SFL 45° / 3000 psi

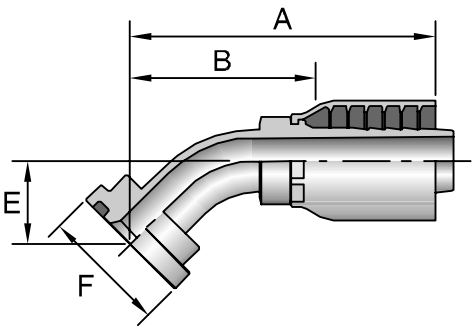

# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
11743-8-8	1/2	12	1/2	83	51	20	30
11743-10-10	5/8	16	5/8	118	81	24	34
11743-12-8	3/4	12	1/2	84	52	21	38
11743-12-12	3/4	20	3/4	98	61	26	38
11743-16-12	1	20	3/4	98	61	26	45
11743-16-16	1	25	1	121	80	32	45
11743-20-16	1-1/4	25	1	121	80	32	51
11743-20-20	1-1/4	32	1-1/4	142	95	38	51
11743-20-24	1-1/4	40	1-1/2	138	104	35	51
11743-24-24	1-1/2	40	1-1/2	140	105	36	60
11743-32-24	2	40	1-1/2	139	105	36	71
11743-32-32	2	50	2	184	138	50	71


PDF Compressor Free Version

12743
SAE 61系列 - 60°法兰接头
ISO 12151-3 - E60 - L / 3000 psi

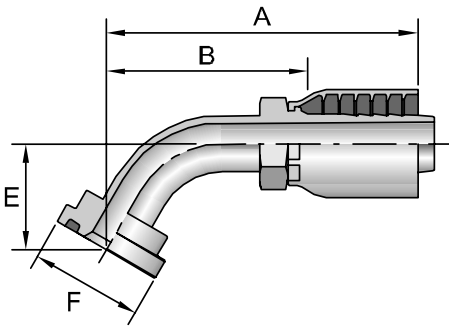

# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
12743-12-12	3/4	20	3/4	105	69	36	38
12743-16-12	1	20	3/4	105	69	35	45
12743-16-16	1	25	1	113	72	38	45
12743-20-20	1-1/4	32	1-1/4	129	86	43	51

11843
SAE 61系列 - 67.5°法兰接头
ISO 12151-3 - E67 - L / 3000 psi

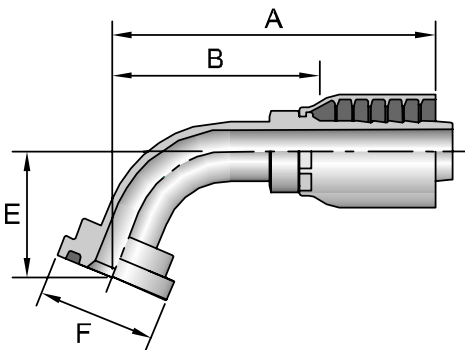


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
11843-12-12	3/4	20	3/4	104	68	41	38
11843-16-16	1	25	1	118	78	44	45
11843-20-20	1-1/4	32	1-1/4	128	86	49	51

PDF Compressor Free Version

11943

SAE 61系列 - 90°法兰接头

ISO 12151-3 - E90 - L - SFL 90° / 3000 psi

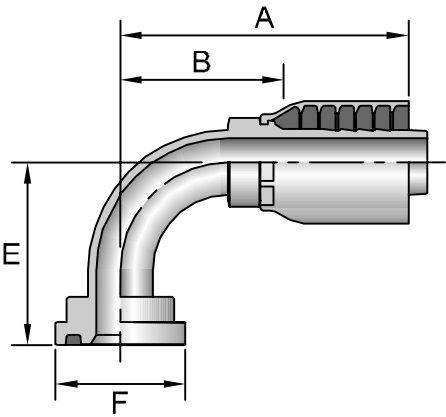


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
11943-8-8	1/2	12	1/2	74	42	41	30
11943-10-10	5/8	16	5/8	94	58	53	34
11943-12-8	3/4	12	1/2	74	42	42	38
11943-12-10	3/4	16	5/8	94	58	53	38
11943-12-12	3/4	20	3/4	89	53	58	38
11943-16-12	1	20	3/4	91	55	57	45
11943-16-16	1	25	1	109	68	71	45
11943-20-16	1-1/4	25	1	108	67	70	51
11943-20-20	1-1/4	32	1-1/4	130	87	90	51
11943-20-24	1-1/4	40	1-1/2	106	72	63	51
11943-24-20	1-1/2	32	1-1/4	129	86	90	60
11943-24-24	1-1/2	40	1-1/2	140	105	79	60
11943-32-24	2	40	1-1/2	139	104	79	71
11943-32-32	2	50	2	171	126	114	71

PDF Compressor Free Version

16A43

SAE 62系列 - 直法兰接头

ISO 12151-3-S-S - SFS / 6000 psi

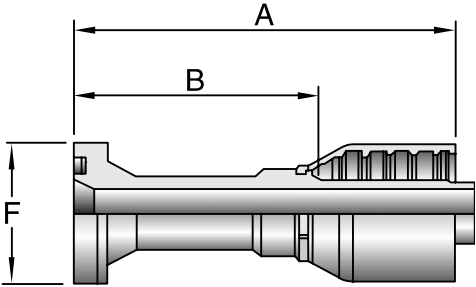


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	F mm
		DN	inch			
16A43-8-8	1/2	12	1/2	86	54	32
16A43-12-12	3/4	20	3/4	105	68	41
16A43-16-12	1	20	3/4	79	42	48
16A43-16-16	1	25	1	122	81	48
16A43-20-16	1-1/4	25	1	92	51	54
16A43-20-20	1-1/4	32	1-1/4	127	84	54

16F43

SAE 62系列 - 45°法兰接头

ISO 12151-3 - E45-S - SFS 45° / 6000 psi

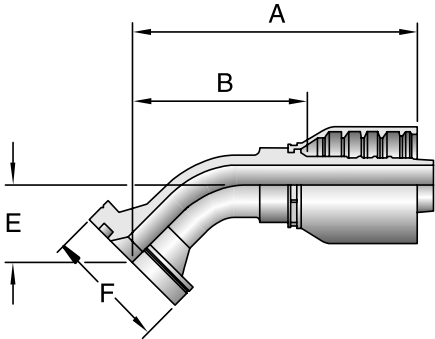


# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
16F43-12-12	3/4	20	3/4	97	61	26	41
16F43-16-16	1	25	1	118	77	32	48
16F43-20-16	1-1/4	25	1	116	75	27	54

PDF Compressor Free Version

16N43**SAE 62系列 - 90°法兰接头**


ISO 12151-3 - E-S - SFS 90° / 6000 psi

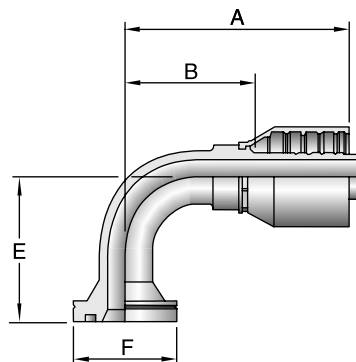

# 型号	法兰 规格	软管内径 I.D.		A mm	B mm	E mm	F mm
		DN	inch				
16N43-12-12	3/4	20	3/4	89	53	58	41
16N43-16-12	1	20	3/4	89	52	58	48
16N43-16-16	1	25	1	109	68	70	48
16N43-20-16	1-1/4	25	1	109	68	70	54
16N43-20-20	1-1/4	32	1-1/4	129	86	90	54

1J043**ORFS外螺纹带O形圈 - 直接头**

ISO 12151-1 - S

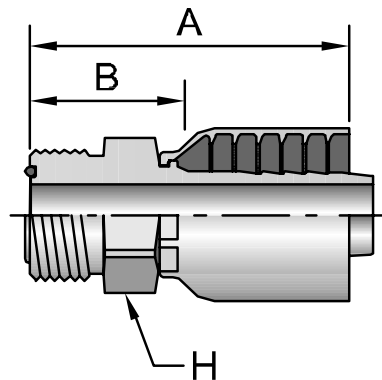


# 型号	 螺纹 UNF		软管内径 I.D.		A mm	B mm	 H
			DN	inch			inch
1J043-4-4	1/4	9/16x18	6	1/4	44	25	5/8
1J043-6-6	3/8	11/16x16	10	3/8	53	27	3/4
1J043-8-8	1/2	13/16x16	12	1/2	61	30	7/8
1J043-10-10	5/8	1x14	16	5/8	69	34	1-1/16
1J043-12-12	3/4	1-3/16x12	20	3/4	74	37	1-1/4
1J043-16-16	1	1-7/16x12	25	1	84	42	1-1/2
1J043-20-20	1-1/4	1-11/16x12	32	1-1/4	84	41	1-3/4

PDF Compressor Free Version

1JB43**ORFS外螺纹带O形圈 - 隔板式 - 直接头**

螺纹标准为 ISO 8434-3-BH

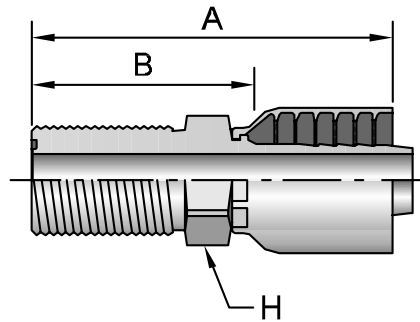


# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H	
			DN	inch	mm	mm	inch	
1JB43-4-4	1/4	9/16x18	6	1/4	68	49	5/8	
1JB43-6-6	3/8	11/16x16	10	3/8	78	52	3/4	
1JB43-8-8	1/2	13/16x16	12	1/2	87	55	7/8	
1JB43-10-8	5/8	1x14	12	1/2	94	62	1-1/16	
1JB43-12-12	3/4	1-3/16x12	16	3/4	100	64	1-1/4	

隔板螺母需单独订货，具体请参见硬管接头样本，WLNL系列。

1JC43**ORFS内螺纹 - 直接头 - 短型**


ISO 12151-1 - SWSA

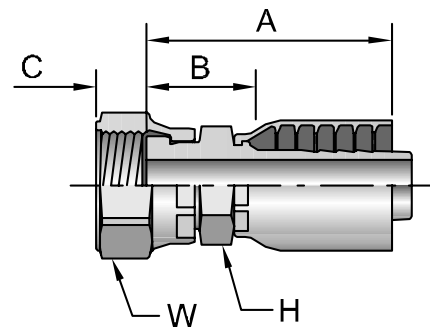

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	C	 H	 W
			DN	inch	mm	mm	mm	inch	inch
1JC43-4-4	1/4	9/16x18	6	1/4	41	22	8	9/16	11/16
1JC43-6-6	3/8	11/16x16	10	3/8	49	23	8	11/16	13/16
1JC43-8-8	1/2	13/16x16	12	1/2	56	24	11	13/16	15/16
1JC43-10-10	5/8	1x14	16	5/8	63	27	13	15/16	1-1/8
1JC43-12-12	3/4	1-3/16x12	20	3/4	68	31	14	1-1/8	1-3/8
1JC43-16-16	1	1-7/16x12	25	1	80	39	15	1-3/8	1-5/8
1JC43-20-20	1-1/4	1-11/16x12	32	1-1/4	83	40	15	1-7/8	1-7/8


PDF Compressor Free Version

1JS43
ORFS内螺纹 - 直接头 - 加长型
ISO 12151-1 SWSB

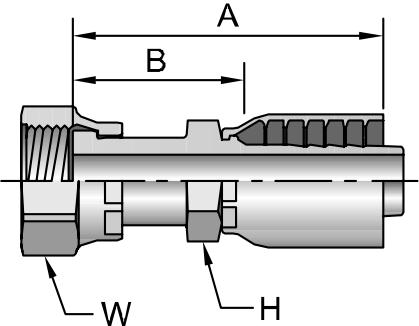

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H	 W
			DN	inch	mm	mm	inch	inch
1JS43-4-4	1/4	9/16x18	6	1/4	53	33	9/16	11/16
1JS43-6-6	3/8	11/16x16	10	3/8	58	32	11/16	13/16
1JS43-8-8	1/2	13/16x16	12	1/2	67	35	13/16	15/16
1JS43-10-10	5/8	1x14	16	5/8	79	42	15/16	1-1/8
1JS43-12-12	3/4	1-3/16x12	20	3/4	84	48	1-1/8	1-3/8
1JS43-16-16	1	1-7/16x12	25	1	92	51	1-3/8	1-5/8
1JS43-20-20	1-1/4	1-11/16x12	32	1-1/4	96	53	1-3/4	1-7/8
1JS43-24-24	1-1/2	2x12	40	1-1/2	99	65	1-7/8	2-1/4


1J743
ORFS内螺纹 - 45°接头
ISO 12151-1 - SWE45°

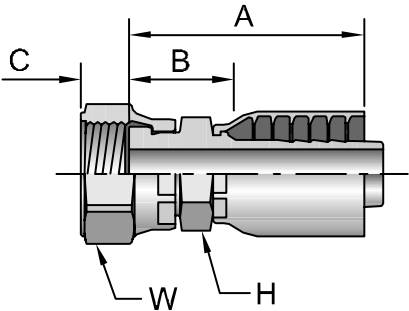

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 E	 W
			DN	inch	mm	mm	mm	inch
1J743-4-4	1/4	9/16x18	6	1/4	50	31	10	11/16
1J743-6-6	3/8	11/16x16	10	3/8	59	33	11	13/16
1J743-8-8	1/2	13/16x16	12	1/2	72	40	15	15/16
1J743-10-10	5/8	1x14	16	5/8	81	44	16	1-1/8
1J743-12-12	3/4	1-3/16x12	20	3/4	92	56	21	1-3/8
1J743-16-16	1	1-7/16x12	25	1	111	70	24	1-5/8
1J743-20-20	1-1/4	1-11/16x12	32	1-1/4	121	78	25	1-7/8
1J743-24-24	1-1/2	2x12	40	1-1/2	119	85	27	2-1/4


PDF Compressor Free Version

1J943
ORFS内螺纹 - 90°接头 - 短型
ISO 12151-1 - SWES

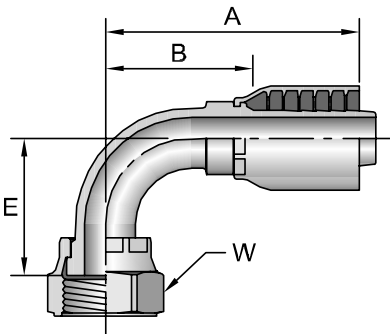

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
1J943-4-4	1/4	9/16x18	6	1/4	45	26	21	11/16
1J943-6-6	3/8	11/16x16	10	3/8	56	30	23	13/16
1J943-8-8	1/2	13/16x16	12	1/2	66	34	29	15/16
1J943-10-10	5/8	1x14	16	5/8	76	39	32	1-1/8
1J943-12-12	3/4	1-3/16x12	20	3/4	78	52	48	1-3/8
1J943-16-16	1	1-7/16x12	25	1	109	68	56	1-5/8
1J943-20-20	1-1/4	1-11/16x12	32	1-1/4	124	81	64	1-7/8
1J943-24-24	1-1/2	2x12	40	1-1/2	140	105	68	2-1/4


1J543
ORFS内螺纹 - 90°接头 - 中型
ISO 12151-1 - SWEM90

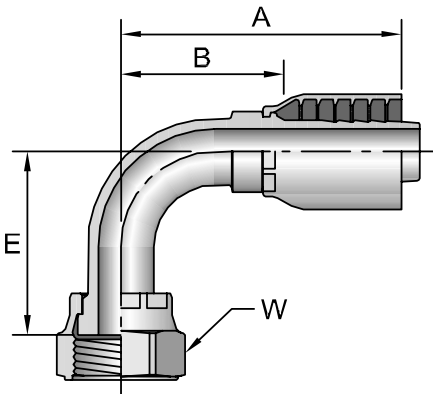

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
1J543-4-4	1/4	9/16x18	6	1/4	53	34	32	11/16
1J543-6-6	3/8	11/16x16	10	3/8	61	35	38	13/16
1J543-8-8	1/2	13/16x16	12	1/2	66	34	41	15/16
1J543-10-10	5/8	1x14	16	5/8	75	39	47	1-1/8
1J543-12-12	3/4	1-3/16x12	20	3/4	89	52	58	1-3/8
1J543-16-16	1	1-7/16x12	25	1	123	83	71	1-5/8
1J543-20-20	1-1/4	1-11/16x12	32	1-1/4	124	81	78	1-7/8

PDF Compressor Free Version


1J143
ORFS内螺纹 - 90°接头 - 加长型
ISO 12151-1 - SWEL90

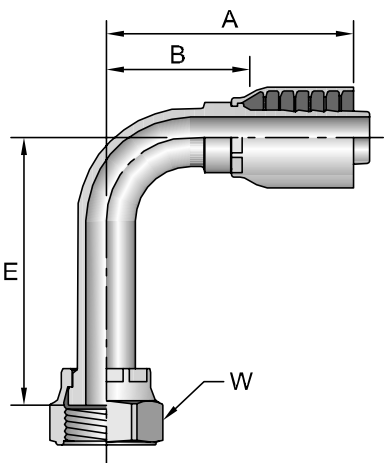

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
1J143-4-4	1/4	9/16x18	6	1/4	51	32	46	11/16
1J143-6-6	3/8	11/16x16	10	3/8	61	35	54	13/16
1J143-8-8	1/2	13/16x16	12	1/2	66	34	64	15/16
1J143-10-10	5/8	1x14	16	5/8	75	39	70	1-1/8
1J143-12-12	3/4	1-3/16x12	20	3/4	90	53	96	1-3/8
1J143-16-16	1	1-7/16x12	25	1	109	68	114	1-5/8
1J143-20-20	1-1/4	1-11/16x12	32	1-1/4	123	80	129	1-7/8

PDF Compressor Free Version

19243
BSPP内螺纹 - 60°锥 - 直接头
BS5200-A - DKR




# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	 W mm
		DN	inch			
19243-2-4	1/8x28	6	1/4	41	17	14
19243-4-4	1/4x19	6	1/4	50	30	19
19243-6-4	3/8x19	6	1/4	44	20	22
19243-6-6	3/8x19	10	3/8	60	34	22
19243-6-8	3/8x19	12	1/2	55	20	22
19243-8-6	1/2x14	10	3/8	51	22	27
19243-8-8	1/2x14	12	1/2	69	37	27
19243-10-8	5/8x14	12	1/2	71	39	30
19243-10-10	5/8x14	16	5/8	76	39	30
19243-12-10	3/4x14	16	5/8	79	42	32
19243-12-12	3/4x14	20	3/4	81	44	32
19243-16-16	1x11	25	1	93	52	41
19243-20-20	1-1/4x11	32	1-1/4	79	32	50

PDF Compressor Free Version

1B143

BSPP内螺纹 - 60°锥 - 45°接头

BS5200-D - DKR 45°

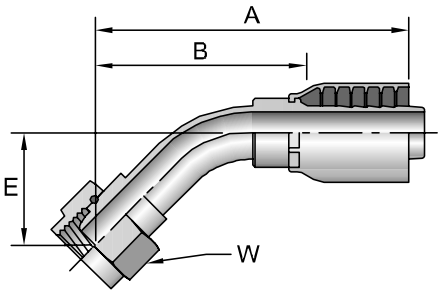


# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	E mm	 H mm
		DN	inch				
1B143-4-4	1/4x19	6	1/4	57	38	15	19
1B143-6-6	3/8x19	10	3/8	66	40	17	22
1B143-8-8	1/2x14	12	1/2	78	46	20	27
1B143-10-10	5/8x14	16	5/8	89	52	23	30
1B143-12-12	3/4x14	20	3/4	95	59	24	32
1B143-16-16	1x11	25	1	119	78	30	41

1B243

BSPP内螺纹 - 60°锥 - 90°接头


BS5200-D - DKR 90°

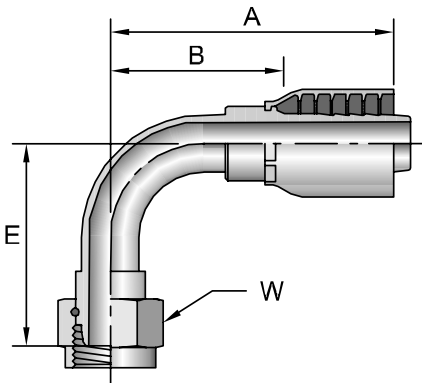

# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	E mm	 W mm
		DN	inch				
1B243-2-4	1/8x28	6	1/4	50	26	28	14
1B243-4-4	1/4x19	6	1/4	46	27	28	19
1B243-6-6	3/8x19	10	3/8	59	34	37	22
1B243-8-8	1/2x14	12	1/2	75	40	40	27
1B243-10-10	5/8x14	16	5/8	80	44	40	30
1B243-12-12	3/4x14	20	3/4	91	51	59	32
1B243-16-16	1x11	25	1	110	65	63	41
1B243-20-20	1-1/4x11	32	1-1/4	120	73	76	50


PDF Compressor Free Version

1B443
BSPP内螺纹 - 60°锥 - 90°接头（紧凑型）
BS5200-E - DKR 90°

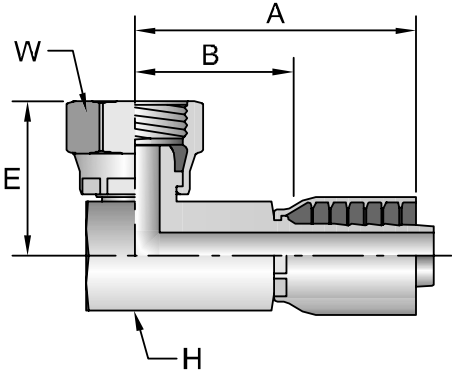

# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	E mm	 H mm	 W mm
		DN	inch					
1B443-4-4	1/4x19	6	1/4	61	36	29	17	19
1B443-6-6	3/8x19	10	3/8	70	36	26	19	22
1B443-8-8	1/2x14	12	1/2	81	40	26	22	27
1B443-12-12	3/4x14	20	3/4	84	25	33	23	32

1D943
BSPP外螺纹 - 60°锥 - 直接头
BS5200 - AGR

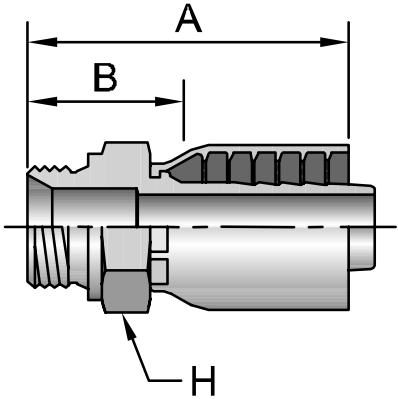


# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	 H mm
		DN	inch			
1D943-4-4	1/4x19	6	1/4	45	23	19
1D943-6-6	3/8x19	10	3/8	54	31	22
1D943-8-6	1/2x14	10	3/8	60	31	27
1D943-8-8	1/2x14	12	1/2	62	28	27
1D943-12-12	3/4x14	20	3/4	70	30	32
1D943-16-16	1x11	25	1	82	35	41

当用于油口平时，需要使用组合垫密封圈

PDF Compressor Free Version

10143
NPTF外螺纹 - 直接头
SAE J476A / J516 - AGN

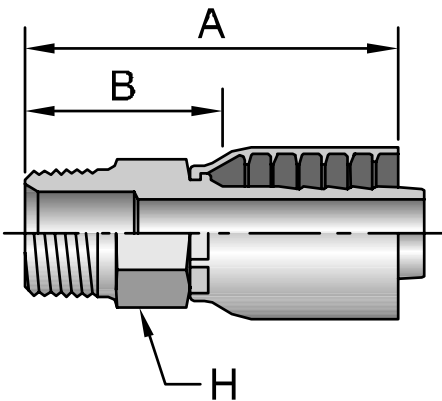


# 型号	 螺纹 NPTF	软管内径 I.D.		A mm	B mm	 H inch
		DN	inch			
10143-2-4	1/8x27	6	1/4	46	27	9/16
10143-4-4	1/4x18	6	1/4	51	32	9/16
10143-4-6	1/4x18	10	3/8	58	32	3/4
10143-6-4	3/8x18	6	1/4	47	28	11/16
10143-6-5	3/8x18	8	5/16	49	30	11/16
10143-6-6	3/8x18	10	3/8	60	34	3/4
10143-6-8	3/8x18	12	1/2	66	34	7/8
10143-8-6	1/2x14	10	3/8	61	35	7/8
10143-8-8	1/2x14	12	1/2	72	40	7/8
10143-8-10	1/2x14	16	5/8	77	40	15/16
10143-8-12	1/2x14	20	3/4	77	41	1-1/16
10143-12-8	3/4x14	12	1/2	68	36	1-1/16
10143-12-10	3/4x14	16	5/8	73	36	1-1/16
10143-12-12	3/4x14	20	3/4	78	42	1-1/16
10143-12-16	3/4x14	25	1	86	45	1-3/8
10143-16-12	1x11-1/2	20	3/4	78	42	22 mm
10143-16-16	1x11-1/2	25	1	66	50	1-3/8
10143-20-20	1-1/4x11-1/2	32	1-1/4	104	61	1-3/4
10143-24-24	1-1/2x11-1/2	40	1-1/2	89	54	2
10143-32-32	2x11-1/2	50	2	103	58	2-1/2

PDF Compressor Free Version

11343


NPTF外螺纹 - 旋转螺母 - 直接头

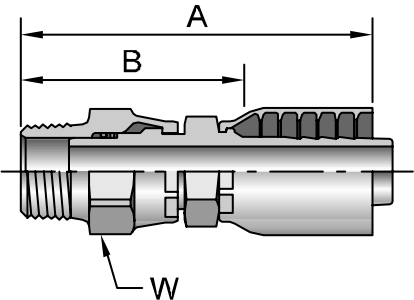

# 型号	 螺纹 NPTF	软管内径 I.D.		A mm	B mm	 W inch
		DN	inch			
11343-2-4	1/8x27	6	1/4	75	56	5/8
11343-4-4	1/4x18	6	1/4	68	49	5/8
11343-6-4	3/8x18	6	1/4	71	52	3/4
11343-6-6	3/8x18	10	3/8	78	52	3/4
11343-8-6	1/2x14	10	3/8	84	58	7/8
11343-8-8	1/2x14	12	1/2	89	57	7/8
11343-12-12	3/4x14	20	3/4	100	63	1-1/4
11343-16-16	1x11-1/2	25	1	115	74	1-1/2

11L43


NPTF外螺纹 - 旋转螺母 - 90°接头

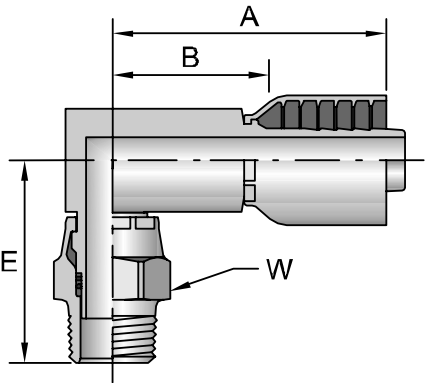

# 型号	 螺纹 NPTF	软管内径 I.D.		A mm	B mm	E mm	 W inch
		DN	inch				
11L43-4-4	1/4x18	6	1/4	57	38	45	5/8
11L43-6-6	3/8x18	10	3/8	64	38	49	3/4
11L43-8-8	1/2x14	12	1/2	75	43	55	7/8
11L43-12-12	3/4x14	20	3/4	84	48	62	1-1/4


PDF Compressor Free Version

10243
NPTF内螺纹 - 直接头

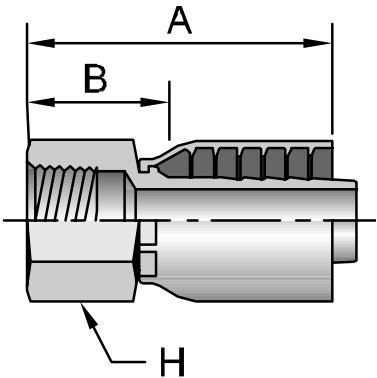

# 型号	 螺纹 NPTF	软管内径 I.D.		A mm	B mm	 H inch
		DN	inch			
10243-4-4	1/4x18	6	1/4	45	26	11/16
10243-6-6	3/8x18	10	3/8	59	33	7/8
10243-8-8	1/2x14	12	1/2	67	35	1-1/8
10243-12-12	3/4x14	20	3/4	69	33	1-1/4

1S243
NPTF内螺纹 - 旋转接头 - 直接头

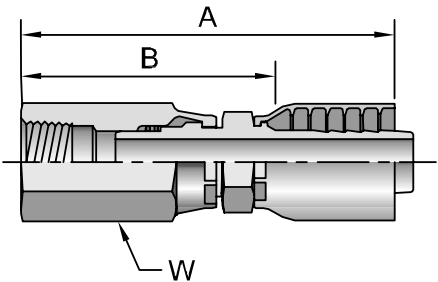


# 型号	 螺纹 NPTF	软管内径 I.D.		A mm	B mm	 W inch
		DN	inch			
1S243-4-4	1/4x18	6	1/4	85	66	3/4

PDF Compressor Free Version

10743

NPSM内螺纹 - 60°锥 - 旋转螺母 - 直接头

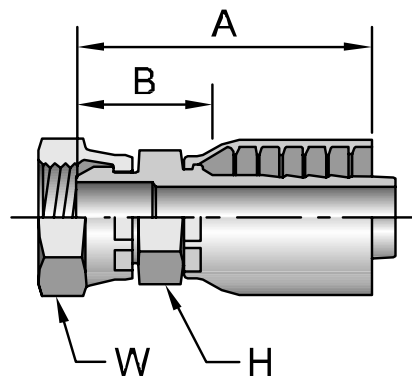


# 型号	 螺纹 NPSM	软管内径 I.D.		A mm	B mm	 H inch	 W inch
		DN	inch				
10743-4-4	1/4x18	6	1/4	44	25	9/16	11/16
10743-6-6	3/8x18	10	3/8	53	27	11/16	7/8
10743-8-8	1/2x14	12	1/2	59	27	15/16	1
10743-12-12	3/4x14	20	3/4	69	37	1-1/16	1-1/4
10743-16-16	1x11-1/2	25	1	78	37	1-3/8	1-1/2
10743-20-20	1-1/4x11-1/2	32	1-1/4	83	40	1-7/8	1-7/8

10343

JIC 37°锥外螺纹 - 直接头

ISO 12151-5

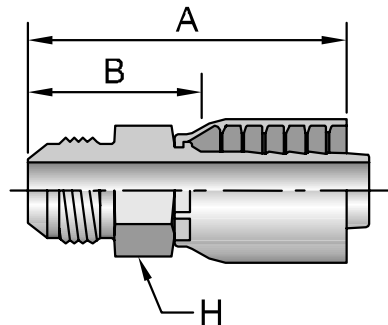


# 型号	 螺纹 UNF		软管内径 I.D.		A mm	B mm	 H inch
	DN	inch	DN	inch			
10343-4-4	1/4	7/16x20	6	1/4	51	31	9/16
10343-6-6	3/8	9/16x18	10	3/8	60	34	3/4
10343-8-8	1/2	3/4x16	12	1/2	68	36	7/8
10343-10-10	5/8	7/8x14	16	5/8	77	40	15/16
10343-12-12	3/4	1-1/16x12	20	3/4	81	44	1-1/8
10343-16-16	1	1-5/16x12	25	1	92	51	1-3/8
10343-20-20	1-1/4	1-5/8x12	32	1-1/4	101	58	1-7/8

PDF Compressor Free Version

1LB43

JIC 37°锥外螺纹 - 隔板式 - 直接头

ISO 12151-5

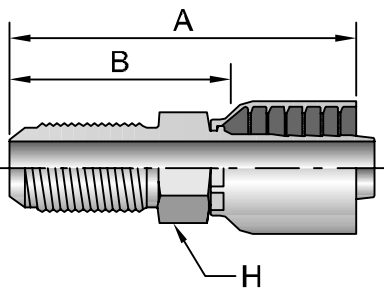


# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H
			DN	inch	mm	mm	inch
1LB43-4-4	1/4	7/16x20	6	1/4	67	48	9/16
1LB43-6-6	3/8	9/16x18	10	3/8	78	52	3/4
1LB43-8-8	1/2	3/4x16	12	1/2	88	56	7/8
1LB43-10-10	5/8	7/8x14	16	5/8	98	61	15/16
1LB43-12-12	3/4	1-1/16x12	20	3/4	104	67	1-1/8

10643

JIC 37°锥内螺纹 - 直接头

ISO 12151-5

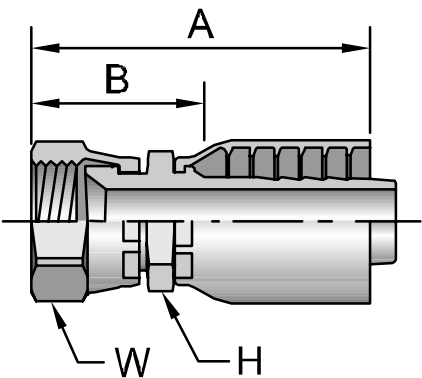


# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H	 W
			DN	inch	mm	mm	mm	inch
10643-4-4	1/4	7/16x20	6	1/4	49	30	9/16	9/16
10643-5-5	5/16	1/2x20	8	5/16	53	34	11/16	5/8
10643-6-4	3/8	9/16x18	6	1/4	52	33	9/16	11/16
10643-6-6	3/8	9/16x18	10	3/8	58	32	11/16	11/16
10643-8-8	1/2	3/4x16	12	1/2	67	35	13/16	7/8
10643-10-10	5/8	7/8x14	16	5/8	74	38	15/16	1
10643-12-12	3/4	1-1/16x12	20	3/4	81	44	1-1/16	1-1/4
10643-16-16	1	1-5/16x12	25	1	92	51	1-3/8	1-1/2
10643-20-20	1-1/4	1-5/8x12	32	1-1/4	100	57	1-7/8	2
10643-24-24	1-1/2	1-7/8x12	40	1-1/2	98	63	2-1/8	2-1/4
10643-32-32	2	2-1/2x12	50	2	120	75	2-1/2	2-7/8

PDF Compressor Free Version

13743

JIC 37°锥内螺纹 - 45°接头 - 短型

ISO 12151-5

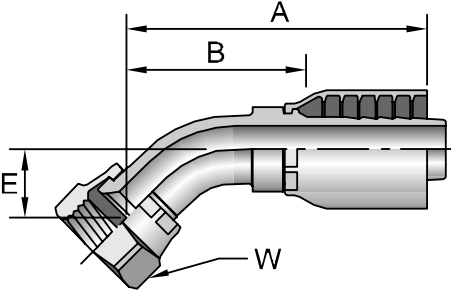


# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
13743-4-4	1/4	7/16x20	6	1/4	50	31	10	9/16
13743-6-6	3/8	9/16x18	10	3/8	61	35	10	11/16
13743-8-8	1/2	3/4x16	12	1/2	72	40	14	7/8
13743-10-10	5/8	7/8x14	16	5/8	81	44	16	1
13743-12-12	3/4	1-1/16x12	20	3/4	92	56	20	1-1/4
13743-16-16	1	1-5/16x12	25	1	110	69	24	1-1/2
13743-20-20	1-1/4	1-5/8x12	32	1-1/4	117	72	30	2
13743-24-24	1-1/2	1-7/8x12	40	1-1/2	140	106	37	2-1/4

1L743

JIC 37°锥内螺纹 - 45°接头 - 中型


ISO 12151-5

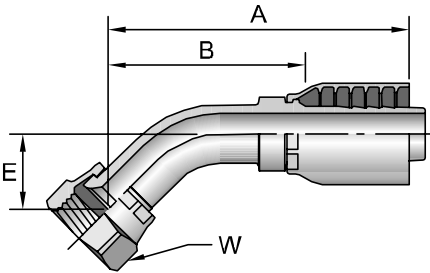

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
1L743-6-6	3/8	9/16x18	10	3/8	62	41	15	11/16
1L743-8-8	1/2	3/4x16	12	1/2	80	49	18	7/8
1L743-12-12	3/4	1-1/16x12	20	3/4	107	71	27	1-1/4
1L743-16-16	1	1-5/16x12	25	1	115	73	27	1-1/2

PDF Compressor Free Version


13943
JIC 37°锥内螺纹 - 90°接头 - 短型
ISO 12151-5

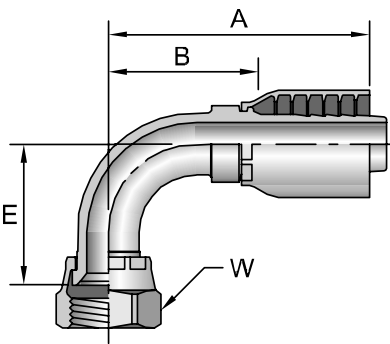

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
13943-4-4	1/4	7/16x20	6	1/4	45	26	21	9/16
13943-5-5	5/16	1/2x20	8	5/16	50	31	21	5/8
13943-6-4	3/8	9/16x18	6	1/4	54	35	22	11/16
13943-6-6	3/8	9/16x18	10	3/8	56	30	23	11/16
13943-8-8	1/2	3/4x16	12	1/2	67	35	29	7/8
13943-10-10	5/8	7/8x14	16	5/8	75	39	32	1
13943-12-12	3/4	1-1/16x12	20	3/4	89	52	48	1-1/4
13943-16-16	1	1-5/16x12	25	1	109	68	56	1-1/2
13943-20-20	1-1/4	1-5/8x12	32	1-1/4	113	70	66	2
13943-24-24	1-1/2	1-7/8x12	40	1-1/2	140	105	81	2-1/4
13943-32-32	2	2-1/2x12	50	2	171,4	126,2	117	2-7/8


PDF Compressor Free Version

1L943
JIC 37°锥内螺纹 - 90°接头 - 中型
ISO 12151-5

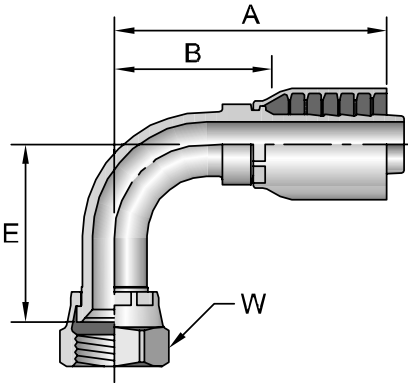

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
1L943-4-4	1/4	7/16x20	6	1/4	47	28	32	9/16
1L943-6-6	3/8	9/16x18	10	3/8	58	32	38	11/16
1L943-8-8	1/2	3/4x16	12	1/2	67	35	41	7/8
1L943-12-12	3/4	1-1/16x12	20	3/4	89	52	58	1-1/4
1L943-16-16	1	1-5/16x12	25	1	113	72	64	1-1/2

14143
JIC 37°锥内螺纹 - 90°接头 - 加长型
ISO 12151-5

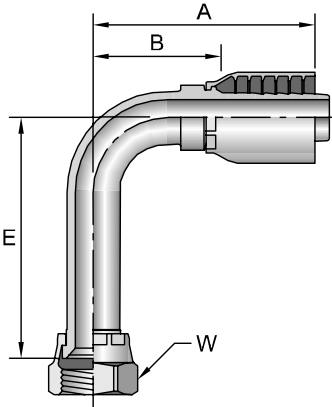


# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
14143-4-4	1/4	7/16x20	6	1/4	50	31	46	9/16
14143-6-6	3/8	9/16x18	10	3/8	58	32	55	11/16
14143-8-8	1/2	3/4x16	12	1/2	67	35	64	7/8
14143-10-10	5/8	7/8x14	16	5/8	80	44	66	1
14143-12-12	3/4	1-1/16x12	20	3/4	89	52	95	1-1/4
14143-16-16	1	1-5/16x12	25	1	99	59	110	1-1/2
14143-20-20	1-1/4	1-5/8x12	32	1-1/4	112	69	134	2

PDF Compressor Free Version

14V43

JIC 37°锥内螺纹 - 150°接头


ISO 12151-5

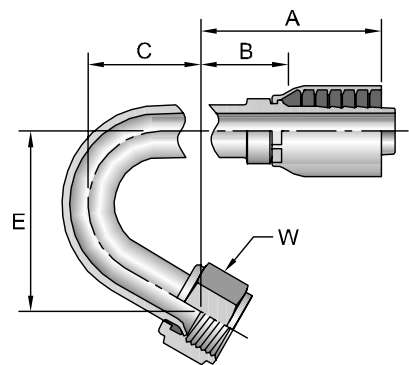

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	C	E	 W
			DN	inch	mm	mm	mm	mm	inch
14V43-6-4	3/8	9/16x18	6	1/4	73	55	11/16	50	11/16

10443


SAE 45°锥外螺纹 - 直接头

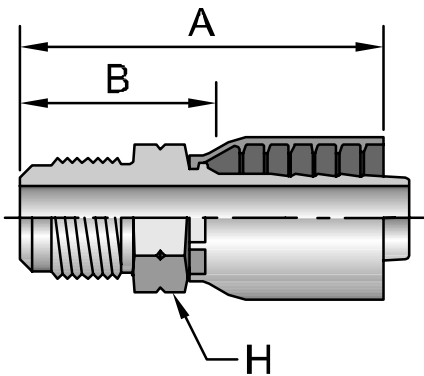

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H
			DN	inch	mm	mm	inch
10443-6-6	3/8	5/8x18	10	3/8	56	31	3/4
10443-12-12	3/4	1-1/16x14	20	3/4	81	45	1-1/8


PDF Compressor Free Version

10843
SAE 45°锥内螺纹 - 直接头

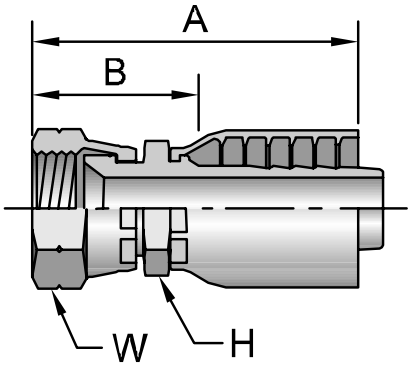

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	 H	 W
			DN	inch	mm	mm	inch	inch
10843-6-4	3/8	5/8x18	6	1/4	54	35	3/4	3/4
10843-6-6	3/8	5/8x18	10	3/8	60	34	3/4	3/4
10843-12-12	3/4	1-1/16x14	20	3/4	81	44	1-1/16	1-1/4


17743
SAE 45°锥内螺纹 - 45°接头

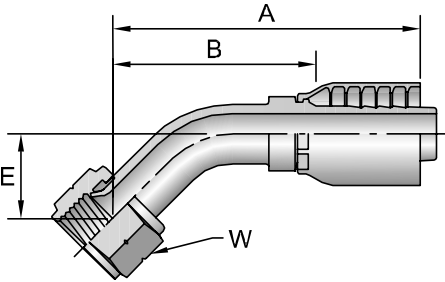

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
17743-4-6	1/4	7/16x20	10	3/8	58	32	8	9/16


PDF Compressor Free Version

17943
SAE 45°锥内螺纹 - 90°接头

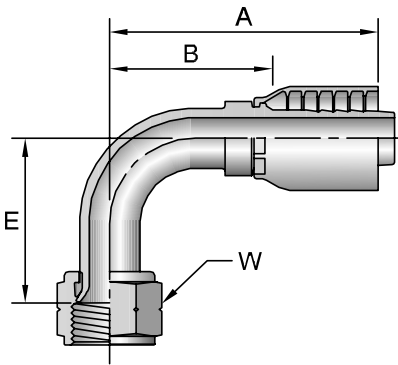

# 型号	 螺纹 UNF		软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	inch
17943-6-6	3/8	5/8x18	10	3/8	54	29	22	3/4

10543
SAE外螺纹带O形圈 - 直接头

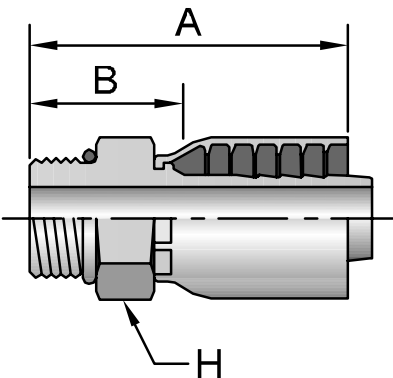


# 型号	 螺纹 UNF	软管内径 I.D.		A mm	B mm	 H inch
		DN	inch			
10543-4-4	7/16x20	6	1/4	42	23	9/16
10543-6-4	9/16x18	6	1/4	42	23	11/16
10543-6-6	9/16x18	10	3/8	53	27	11/16
10543-8-6	3/4x16	10	3/8	54	27	7/8
10543-8-8	3/4x16	12	1/2	62	30	7/8
10543-10-8	7/8x14	12	1/2	60	28	1
10543-12-10	1-1/16x12	16	5/8	71	35	1-1/4
10543-12-12	1-1/16x12	20	3/4	71	35	1-1/4
10543-16-12	1-5/16x12	20	3/4	71	35	1-1/2
10543-16-16	1-5/16x12	25	1	86	44	1-1/2
10543-20-20	1-5/8x12	32	1-1/4	94	51	1-7/8

PDF Compressor Free Version

10G43


SAE外螺纹带O形圈 - 旋转螺母 - 直接头

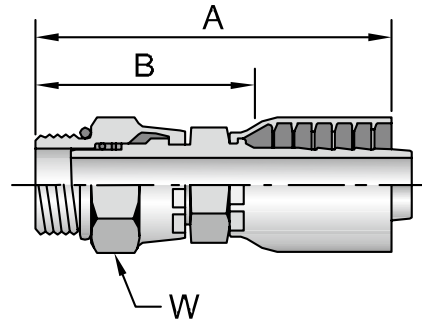

# 型号	 螺纹 UNF	软管内径 I.D.		A mm	B mm	 W inch
		DN	inch			
10G43-6-4	9/16x18	6	1/4	76	57	3/4
10G43-6-6	9/16x18	10	3/8	83	56	3/4
10G43-8-6	3/4x16	10	3/8	78	52	7/8
10G43-8-8	3/4x16	12	1/2	82	50	7/8
10G43-10-8	7/8x14	12	1/2	83	51	1
10G43-12-12	1-1/16x12	20	3/4	96	59	1-1/4

10L43

SAE外螺纹带O形圈 - 旋转螺母 - 90°接头

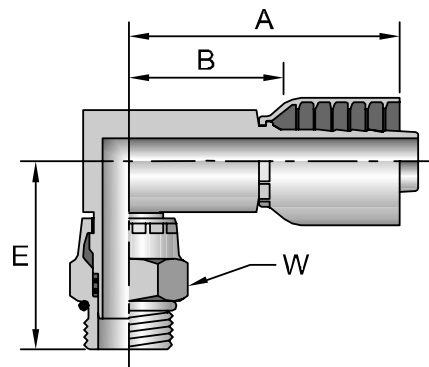


# 型号	 螺纹 UNF	软管内径 I.D.		A mm	B mm	E mm	 W inch
		DN	inch				
10L43-6-6	9/16x18	10	3/8	64	38	53	3/4
10L43-8-8	3/4x16	12	1/2	75	43	47	7/8
10L43-12-12	1-1/16x12	20	3/4	82	48	58	1-1/4

PDF Compressor Free Version

1FU43


BSPP内螺纹 - 30°扩口 - 直接头
JIS B8363 - GUI

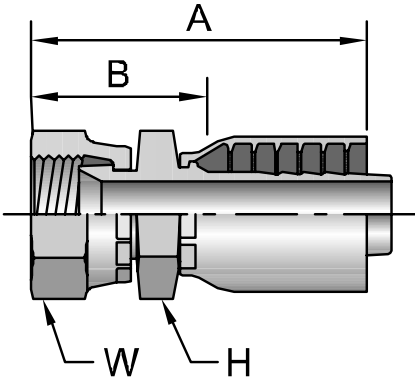

# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	 H mm	 W mm
		DN	inch				
1FU43-4-4	1/4x19	6	1/4	48	29	19	19
1FU43-6-6	3/8x19	10	3/8	59	33	22	22
1FU43-8-8	1/2x14	12	1/2	68	36	27	27
1FU43-12-12	3/4x14	20	3/4	78	41	36	36
1FU43-16-16	1x11	25	1	90	49	41	41
1FU43-20-20	1-1/4x11	32	1-1/4	98	55	50	50

1GU43

BSPP内螺纹 - 60°锥 - 直接头
JIS B8363 - GUO

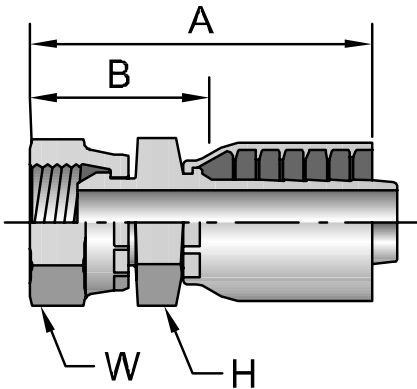


# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	 H mm	 W mm
		DN	inch				
1GU43-4-4	1/4x19	6	1/4	53	34	19	19
1GU43-6-6	3/8x19	10	3/8	62	36	22	22
1GU43-8-8	1/2x14	12	1/2	71	40	27	27
1GU43-12-12	3/4x14	20	3/4	82	46	36	36
1GU43-16-16	1x11	25	1	95	54	41	41
1GU43-20-20	1-1/4x11	32	1-1/4	103	60	50	50

PDF Compressor Free Version

1UT43**BSPP外螺纹 - 60°锥-直接头**


JIS B8363 Code R

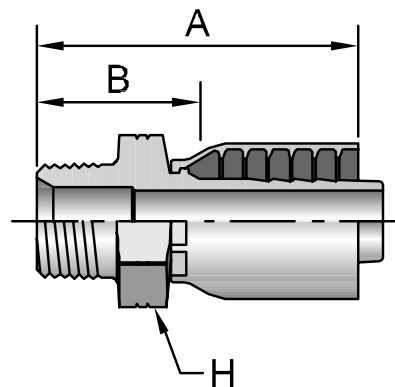

# 型号	 螺纹 BSPP	软管内径 I.D.		A mm	B mm	 H mm
		DN	inch			
1UT43-4-4	1/4x19	1/4	1/4	49	30	19
1UT43-6-6	3/8x19	3/8	3/8	57	31	22
1UT43-8-8	1/2x14	1/2	1/2	68	36	27
1UT43-12-12	3/4x14	3/4	3/4	75	39	36
1UT43-16-16	1x11	1	1	88	47	41
1UT43-20-20	1-1/4x11	1-1/4	1-1/4	95	53	50

1MU43**公制内螺纹 - 30°扩口 - 直接头**

JIS B8363 - MU

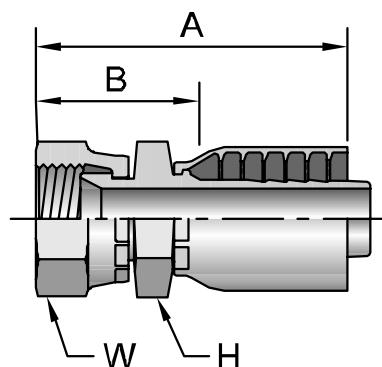


# 型号	 螺纹 公制	软管内径 I.D.		A mm	B mm	 H mm	 W mm
		DN	inch				
1MU43-4-4	M14x1.5	6	1/4	53	34	19	19
1MU43-6-6	M18x1.5	10	3/8	62	36	24	24
1MU43-8-8	M22x1.5	12	1/2	72	40	27	27

PDF Compressor Free Version

1XU43


公制内螺纹 - 30°扩口 - 直接头
JIS B8363 - MU

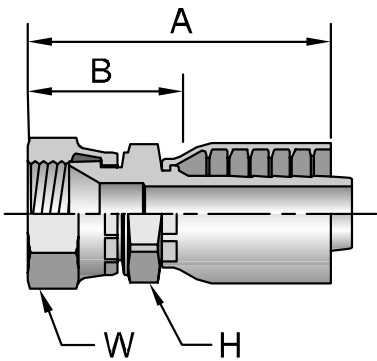

# 型号	 螺纹 公制	软管内径 I.D.		A mm	B mm	 H mm	 W mm
		DN	inch				
1XU43-10-10	M24x1.5	16	5/8	83	46	30	32
1XU43-12-12	M30x1.5	20	3/4	86	50	32	36
1XU43-16-16	M33x1.5	14	1	102	61	36	41
1XU43-20-20	M36x1.5	32	1-1/4	106	64	46	46
1XU43-24-24	M42x1.5	40	1-1/2	105	70	50	55

1EN43


UPTC外螺纹 - 直接头

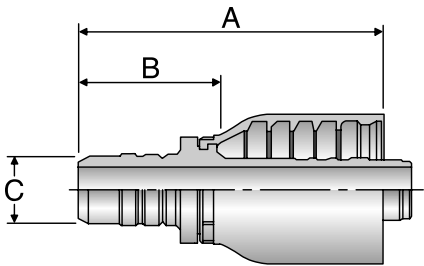

# 型号	软管内径 I.D.		A mm	B mm	公称尺寸C mm
	DN	inch			
1EN43-8-4	6	1/4	46	27	8
1EN43-12-6	10	3/8	55	28	12
1EN43-15-8	12	1/2	64	32	15
1EN43-18-10	16	5/8	71	34	18
1EN43-22-12	20	3/4	71	35	22


PDF Compressor Free Version

1EU43
UPTC外螺纹 - 45°接头

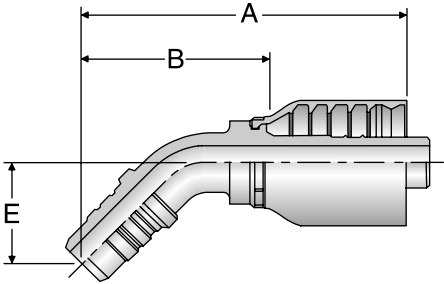

# 型号	软管内径 I.D.		A mm	B mm	E mm	公称尺寸C mm
	DN	inch				
1EU43-8-4	6	1/4	63	44	23	8
1EU43-12-6	10	3/8	72	46	23	12
1EU43-15-8	12	1/2	81	49	25	15
1EU43-18-10	16	5/8	93	57	32	18
1EU43-22-12	20	3/4	96	59	33	22

1ET43
UPTC外螺纹 - 90°接头




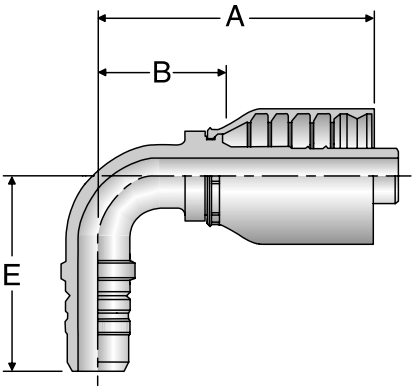


# 型号	软管内径 I.D.		A mm	B mm	E mm	公称尺寸C mm
	DN	inch				
1ET43-8-4	6	1/4	45	26	39	8
1ET43-12-6	10	3/8	56	30	39	12
1ET43-15-8	12	1/2	64	32	45	15
1ET43-18-10	16	5/8	75	39	57	18
1ET43-22-12	20	3/4	87	51	64	22










PDF Compressor Free Version

77系列






PDF Compressor Free Version
DIN - 公制

C9 A-100  24°锥内螺纹 - 重系列 - O形圈 - 直接头	0C A-100  24°锥内螺纹 - 重系列 - O形圈 - 45°接头	1C A-100  24°锥内螺纹 - 重系列 - O形圈 - 90°接头	D2 A-101  24°锥外螺纹 - 重系列 - 直接头
--	--	--	---







法兰

15 A-101  SAE 61系列 - 直法兰接头	4A A-101  SAE 61系列 - 直法兰接头 (5000 psi)	17 A-102  SAE 61系列 - 45°法兰接头	4F A-102  SAE 61系列 - 45°法兰接头 (5000 psi)	19 A-102  SAE 61系列 - 90°法兰接头	4N A-103  SAE 61系列 - 90°法兰接头 (5000 psi)
6A A-103  SAE 62系列 - 直法兰接头	6F A-103  SAE 62系列 - 45°法兰接头	6N A-104  SAE 62系列 - 90°法兰接头	X5 A-104  整体法兰 - 直接头	X7 A-104  整体法兰 - 45°接头	X9 A-105  整体法兰 - 90°接头
XA A-105  Caterpillar® - 直法兰接头	XB A-105  Caterpillar® - 22.5°法兰接头	XF A-106  Caterpillar® - 45°法兰接头	XG A-106  Caterpillar® - 60°法兰接头	XN A-106  Caterpillar® - 90°法兰接头	

ORFS


JC A-107  ORFS内螺纹 - 直接头 - 短型	JS A-107  ORFS内螺纹 - 直接头 - 加长型	J7 A-107  ORFS内螺纹 - 45°接头	J9 A-108  ORFS内螺纹 - 90°接头 - 短型	J1 A-108  ORFS内螺纹 - 90°接头 - 加长型	J0 A-108  ORFS外螺纹带O形圈 - 直接头
---	--	---	--	--	--

SAE PDF Compressor Free Version

01	A-109	03	A-109	06	A-109	37	A-110	39	A-110	05	A-110
											
NPTF外螺纹 - 直接头		JIC 37°锥外螺纹 - 直接头		JIC 37°锥内螺纹 - 直接头		JIC 37°锥内螺纹 - 45°接头 - 短型		JIC 37°锥内螺纹 - 90°接头 - 短型		SAE外螺纹带O形圈 - 直接头	

PDF Compressor Free Version


1C977
公制24°锥内螺纹带O形圈 - 重系列 - 直接头
ISO 12151-2-SWS-S – DKOS

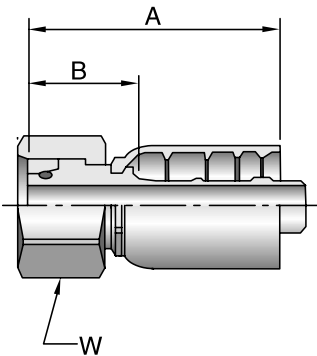

# 型号	 螺纹 公制		 软管内径 I.D.		A mm	B mm	 W mm
			DN	inch			
1C977-16-8	16	M24x1.5	12	1/2	60	28	30
1C977-16-10	16	M24x1.5	16	5/8	67	33	30
1C977-20-10	20	M30x2	16	5/8	67	33	36
1C977-20-12	20	M30x2	20	3/4	76	34	36
1C977-25-12	25	M36x2	20	3/4	77	35	46
1C977-25-16	25	M36x2	25	1	91	40	46
1C977-30-12	30	M42x2	20	3/4	80	39	50
1C977-30-16	30	M42x2	25	1	89	40	50
1C977-30-20	30	M42x2	32	1-1/4	104	46	50
1C977-38-20	38	M52x2	32	1-1/4	100	42	60
1C977-38-24	38	M52x2	40	1-1/2	104	43	60


PDF Compressor Free Version

10C77
公制24°锥内螺纹带O形圈 - 重系列 - 45°接头
ISO 12151-2 – SWE 45°-S – DKOS 45°

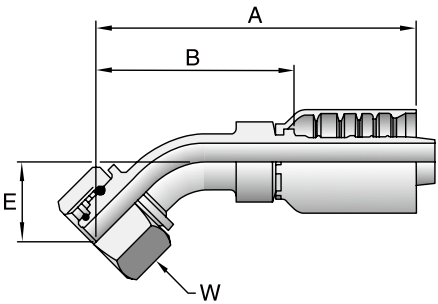

# 型号	 螺纹 公制		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
10C77-16-8	16	M24x1.5	12	1/2	83	52	24	30
10C77-20-10	20	M30x2	16	5/8	107	73	28	36
10C77-20-12	20	M30x2	20	3/4	120	79	30	36
10C77-25-12	25	M36x2	20	3/4	119	78	29	46
10C77-30-16	30	M42x2	25	1	142	93	33	50
10C77-38-20	38	M52x2	32	1-1/4	168	110	37	60
10C77-38-24	38	M52x2	40	1-1/2	198	138	49	60

11C77
24°锥内螺纹 - 重系列 - O形圈 - 90°接头
ISO 12151-2-SWE

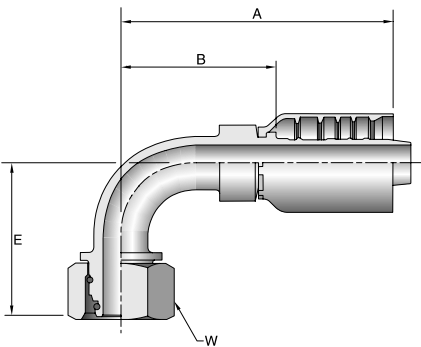


# 型号	 螺纹 公制		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
11C77-16-8	16	M24x1.5	12	1/2	77	46	45	30
11C77-20-10	20	M30x2	16	5/8	92	58	53	36
11C77-20-12	20	M30x2	20	3/4	108	66	60	36
11C77-25-12	25	M36x2	20	3/4	108	66	59	46
11C77-25-16	25	M36x2	25	1	131	82	70	46
11C77-30-16	30	M42x2	25	1	131	82	69	50
11C77-38-20	38	M52x2	32	1-1/4	160	102	78	60
11C77-38-24	38	M52x2	40	1-1/2	184	123	101	60

PDF Compressor Free Version

1D277

公制24°锥外螺纹 - 重系列 - 直接头

ISO 12151-2-S-S - CES

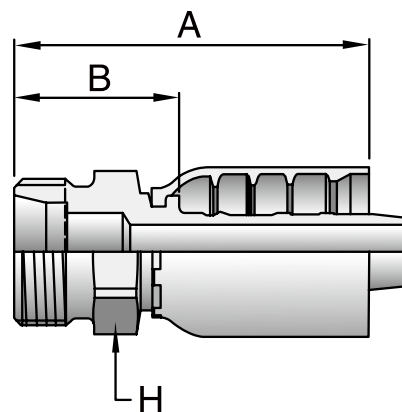


# 型号	 螺纹 公制		 软管内径 I.D.		A mm	B mm	 H mm
			DN	inch			
1D277-16-8	16	M24x1.5	12	1/2	64	33	24
1D277-20-10	20	M30x2	16	5/8	72	38	30
1D277-20-12	20	M30x2	20	3/4	84	42	30
1D277-25-12	25	M36x2	20	3/4	86	45	36
1D277-25-16	25	M36x2	25	1	96	47	36
1D277-30-16	30	M42x2	25	1	99	50	46
1D277-38-20	38	M52x2	32	1-1/4	114	57	55
1D277-38-24	38	M52x2	40	1-1/2	121	60	55

11577

SAE 61系列 - 直法兰接头

ISO 12151-3-S-L - SFL

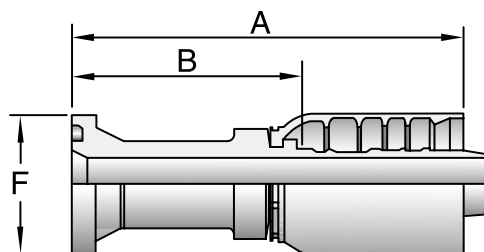


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	 F mm
		DN	inch			
11577-8-8	1/2	12	1/2	90	59	30
11577-10-10	5/8	16	5/8	99	65	34
11577-12-8	3/4	12	1/2	64	33	38
11577-12-10	3/4	16	5/8	75	41	38
11577-12-12	3/4	20	3/4	107	66	38
11577-16-12	1	20	3/4	83	42	45
11577-16-16	1	25	1	119	70	45
11577-32-32	2	50	2	163	93	71

PDF Compressor Free Version

14A77

SAE 61系列 - 直法兰接头 (5000 psi)

ISO 12151-3-S-L - SFL

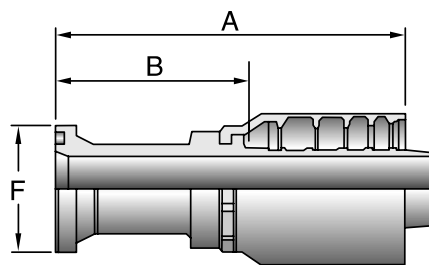


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	 F mm
		DN	inch			
14A77-20-16	1-1/4	25	1	90	40	51
14A77-20-20	1-1/4	32	1-1/4	138	80	51
14A77-24-20	1-1/2	32	1-1/4	100	42	60
14A77-24-24	1-1/2	40	1-1/2	140	80	60
14A77-32-24	2	40	1-1/2	117	56	71
14A77-32-32	2	50	2	163	93	71

11777

SAE 61系列 - 45° 法兰接头

ISO 12151-3-E45-L - SFL45°

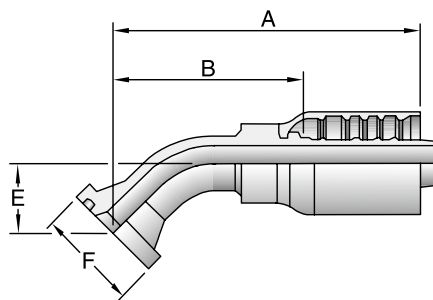


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
11777-8-8	1/2	12	1/2	79	48	20	30
11777-12-12	3/4	20	3/4	116	75	26	38
11777-16-12	1	20	3/4	116	75	26	45
11777-16-16	1	25	1	130	80	32	45
11777-32-32	2	50	2	218	148	56	71

PDF Compressor Free Version

14F77

SAE 61系列 - 45° 法兰接头 (5000 psi)

ISO 12151-3-E45-L - SFL45°

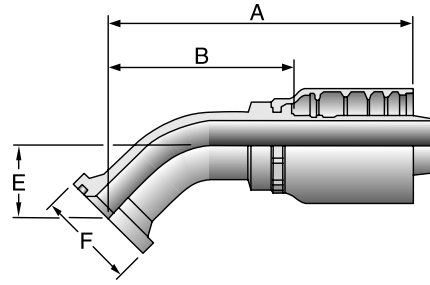


# 型号				A mm	B mm	E mm	 F mm
		软管内径 I.D. DN	inch				
14F77-20-16	1-1/4	25	1	130	80	32	51
14F77-20-20	1-1/4	32	1-1/4	169	112	38	51
14F77-24-20	1-1/2	32	1-1/4	169	112	38	60
14F77-24-24	1-1/2	40	1-1/2	193	133	44	60
14F77-32-24	2	40	1-1/2	193	133	44	71
14F77-32-32	2	50	2	218	148	56	71

11977

SAE 61系列 - 90° 法兰接头

ISO 12151-3-E-L - SFL

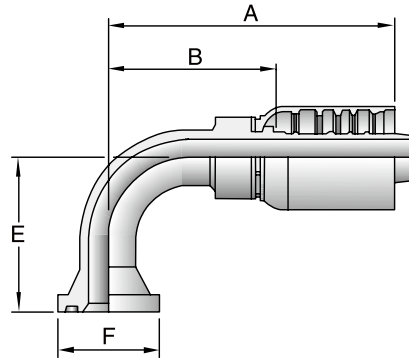


# 型号				A mm	B mm	E mm	 F mm
		软管内径 I.D. DN	inch				
11977-8-8	1/2	12	1/2	76	45	41	30
11977-12-8	3/4	12	1/2	71	40	41	38
11977-12-12	3/4	20	3/4	108	66	58	38
11977-16-10	1	16	5/8	82	66	53	45
11977-16-12	1	20	3/4	108	66	58	45
11977-16-16	1	25	1	120	70	70	45
11977-20-20	1-1/4	32	1-1/4	160	102	90	51
11977-24-24	1-1/2	40	1-1/2	184	123	104	60
11977-32-32	2	50	2	222	152	138	71

PDF Compressor Free Version

14N77

SAE 61系列 - 90°法兰接头 (5000 psi)

ISO 12151-3-E-L - SFL90°

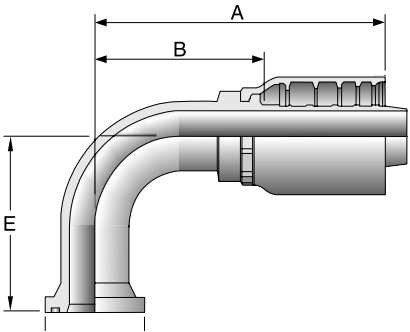


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
14N77-20-16	1-1/4	25	1	120	70	70	51
14N77-20-20	1-1/4	32	1-1/4	159	102	90	51
14N77-24-20	1-1/2	32	1-1/4	160	102	90	60
14N77-24-24	1-1/2	40	1-1/2	184	123	104	60
14N77-32-24	2	40	1-1/2	184	123	104	71
14N77-32-32	2	50	2	222	152	138	71

16A77

SAE 62系列 - 直法兰接头

ISO 12151-3-S-S - SFS / 6000 psi

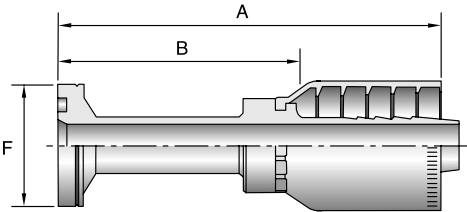


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	 F mm
		DN	inch			
16A77-8-8	1/2	12	1/2	89	58	32
16A77-12-10	3/4	16	5/8	75	41	41
16A77-12-12	3/4	20	3/4	114	73	41
16A77-12-16	3/4	25	1	126	77	41
16A77-16-12	1	20	3/4	88	47	48
16A77-16-16	1	25	1	113	64	48
16A77-16-20	1	32	1-1/4	144	86	48
16A77-20-16	1-1/4	25	1	103	53	54
16A77-20-20	1-1/4	32	1-1/4	146	88	54
16A77-20-24	1-1/4	40	1-1/2	154	93	54
16A77-24-16	1-1/2	25	1	108	58	64
16A77-24-20	1-1/2	32	1-1/4	118	60	64
16A77-24-24	1-1/2	40	1-1/2	162	102	64
16A77-32-24	2	40	1-1/2	133	72	79
16A77-32-32	2	50	2	182	112	79

PDF Compressor Free Version

16F77

SAE 62系列 - 45° 法兰接头

ISO 12151-3-E45-S - SFS45° / 6000 psi

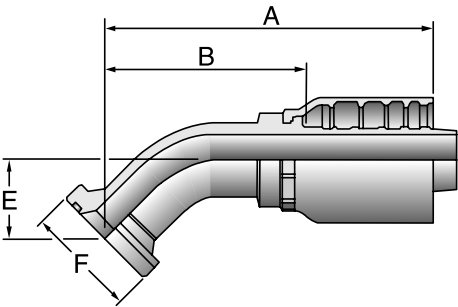


# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
16F77-8-8	1/2	12	1/2	79	48	19	32
16F77-12-10	3/4	16	5/8	96	62	26	41
16F77-12-12	3/4	20	3/4	116	75	26	41
16F77-12-16	3/4	25	1	127	77	32	41
16F77-16-12	1	20	3/4	116	75	26	48
16F77-16-16	1	25	1	130	80	32	48
16F77-16-20	1	32	1-1/4	154	96	38	48
16F77-20-16	1-1/4	25	1	130	80	32	54
16F77-20-20	1-1/4	32	1-1/4	169	112	38	54
16F77-20-24	1-1/4	40	1-1/2	186	125	44	54
16F77-24-20	1-1/2	32	1-1/4	169	112	38	64
16F77-24-24	1-1/2	40	1-1/2	193	133	44	64
16F77-32-32	2	50	2	218	148	56	79

PDF Compressor Free Version

16N77

SAE 62 系列 - 90° 法兰接头

ISO 12151-3 - E90S - S (整体式: ISO 12151-3 - E90M - S)

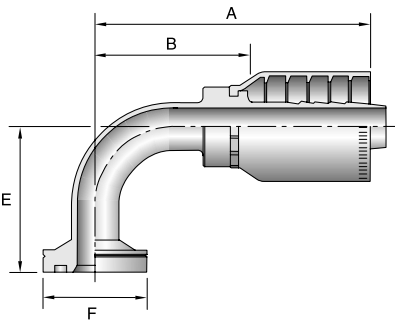


#							
型号	法兰 规格	软管内径 I.D.		A	B	E	F
		DN	inch	mm	mm	mm	mm
16N77-8-8	1/2	12	1/2	71	40	41	32
16N77-8-10	1/2	16	5/8	79	44	54	32
16N77-12-10	3/4	16	5/8	92	58	54	41
16N77-12-12	3/4	20	3/4	108	66	58	41
16N77-12-16	3/4	20	3/4	112	63	70	41
16N77-16-12	1	20	3/4	108	66	58	48
16N77-16-16	1	25	1	120	70	70	48
16N77-16-20	1	32	1-1/4	138	80	90	48
16N77-20-16	1-1/4	25	1	123	73	70	54
16N77-20-20	1-1/4	32	1-1/4	160	102	90	54
16N77-20-24	1-1/4	40	1-1/2	170	104	104	54
16N77-24-20	1-1/2	32	1-1/4	160	102	90	64
16N77-24-24	1-1/2	40	1-1/2	184	123	104	64
16N77-32-24	2	40	1-1/2	184	123	104	79
16N77-32-32	2	50	2	222	152	138	79

PDF Compressor Free Version

1X577


整体法兰 - 直接头 - 61/62系列

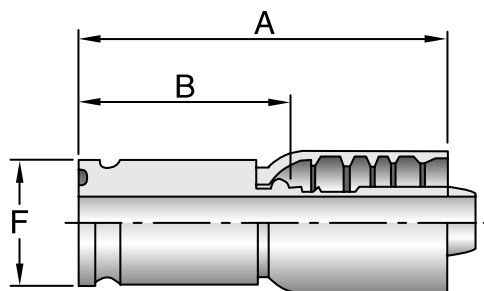

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	 F mm
		DN	inch			
1X577-8-8	1/2	12	1/2	62	31	26
1X577-12-12	3/4	20	3/4	103	62	35
1X577-16-12	1	20	3/4	103	62	39
1X577-16-16	1	25	1	113	64	39
1X577-16-20	1	32	1-1/4	120	63	39
1X577-20-16	1-1/4	25	1	113	64	46
1X577-20-20	1-1/4	32	1-1/4	120	63	46
1X577-24-20	1-1/2	32	1-1/4	123	66	56
1X577-24-24	1-1/2	40	1-1/2	129	68	56

1X777


整体法兰 - 45°接头 - 61/62系列

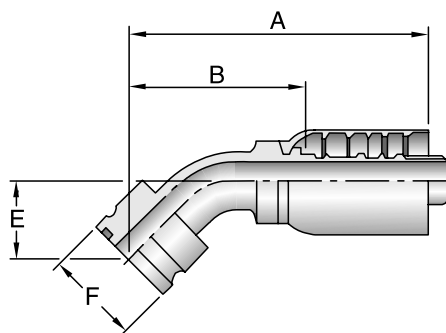

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1X777-12-12	3/4	20	3/4	119	77	29	35
1X777-16-12	1	20	3/4	118	77	29	39
1X777-16-16	1	25	1	130	80	32	39
1X777-16-20	1	32	1-1/4	154	96	38	39
1X777-20-16	1-1/4	25	1	136	86	38	46
1X777-20-20	1-1/4	32	1-1/4	171	113	40	46
1X777-24-20	1-1/2	32	1-1/4	175	117	44	56
1X777-24-24	1-1/2	40	1-1/2	199	139	50	56

PDF Compressor Free Version


1X977
整体法兰 - 90°接头 - 61/62系列

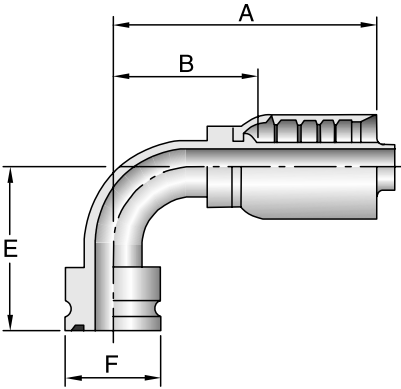

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1X577-8-8	1/2	12	1/2	80	49	43	26
1X977-12-12	3/4	20	3/4	108	66	61	35
1X977-12-16	3/4	25	1	110	61	70	35
1X977-16-12	1	20	3/4	108	66	61	39
1X977-16-16	1	25	1	120	71	70	39
1X977-16-20	1	32	1-1/4	138	81	90	39
1X977-20-16	1-1/4	25	1	120	71	70	46
1X977-20-20	1-1/4	32	1-1/4	160	102	90	46
1X977-24-20	1-1/2	32	1-1/4	160	102	90	56
1X977-24-24	1-1/2	40	1-1/2	184	123	138	56


PDF Compressor Free Version

1XA77
直法兰接头

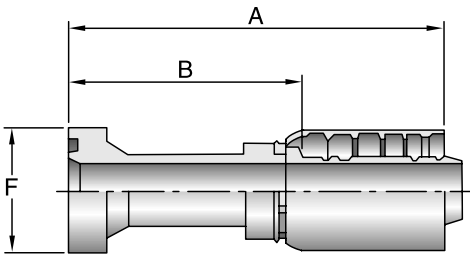

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	 F mm
		DN	inch			
1XA77-12-12	3/4	20	3/4	114	72	41
1XA77-12-16	3/4	25	1	126	77	41
1XA77-16-12	1	20	3/4	88	47	48
1XA77-16-16	1	25	1	141	91	48
1XA77-20-16	1-1/4	25	1	104	55	54
1XA77-20-20	1-1/4	32	1-1/4	152	94	54
1XA77-20-24	1-1/4	40	1-1/2	161	100	54
1XA77-24-20	1-1/2	32	1-1/4	118	60	64
1XA77-24-24	1-1/2	40	1-1/2	176	116	64
1XA77-32-24	2	40	1-1/2	133	72	79
1XA77-32-32	2	50	2	192	122	79


1XB77
22.5°法兰接头

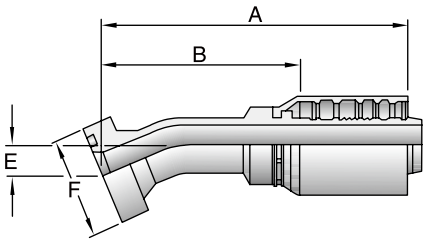

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1XB77-12-12	3/4	20	3/4	129	88	14	41
1XB77-16-12	1	20	3/4	129	88	14	48
1XB77-16-16	1	25	1	144	94	14	48
1XB77-20-16	1-1/4	25	1	144	94	14	54
1XB77-20-20	1-1/4	32	1-1/4	177	119	17	54
1XB77-24-20	1-1/2	32	1-1/4	177	119	17	64
1XB77-24-24	1-1/2	40	1-1/2	205	144	18	64


PDF Compressor Free Version

1XF77
45°法兰接头

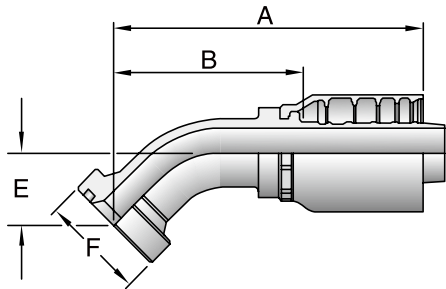

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1XF77-12-12	3/4	20	3/4	121	79	31	41
1XF77-16-12	1	20	3/4	121	79	31	48
1XF77-16-16	1	25	1	134	84	36	48
1XF77-20-16	1-1/4	25	1	134	84	36	54
1XF77-20-20	1-1/4	32	1-1/4	168	111	37	54
1XF77-24-20	1-1/2	32	1-1/4	168	111	37	64
1XF77-24-24	1-1/2	40	1-1/2	194	134	45	64


1XG77
60°法兰接头

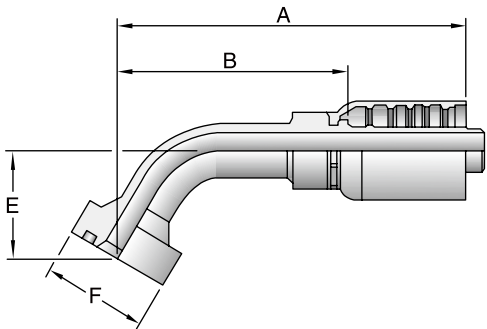

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1XG77-12-12	3/4	20	3/4	136	94	42	41
1XG77-16-12	1	20	3/4	136	94	42	48
1XG77-16-16	1	25	1	152	102	50	48
1XG77-20-16	1-1/4	25	1	155	106	44	54
1XG77-20-20	1-1/4	32	1-1/4	207	149	51	54
1XG77-24-20	1-1/2	32	1-1/4	190	132	51	64
1XG77-24-24	1-1/2	40	1-1/2	204	144	65	64


PDF Compressor Free Version

1XN77
90°法兰接头

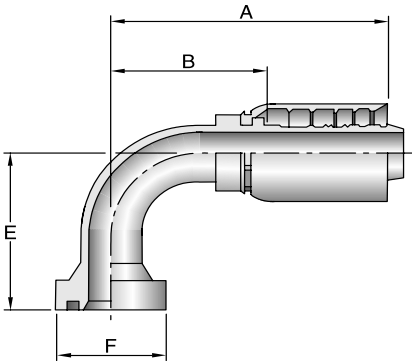

# 型号	 法兰 规格	 软管内径 I.D.		A mm	B mm	E mm	 F mm
		DN	inch				
1XN77-12-12	3/4	20	3/4	107	66	63	41
1XN77-16-12	1	20	3/4	107	66	63	48
1XN77-16-16	1	25	1	120	70	74	48
1XN77-20-16	1-1/4	25	1	120	70	74	54
1XN77-20-20	1-1/4	32	1-1/4	160	102	94	54
1XN77-20-24	1-1/4	40	1-1/2	170	109	106	54
1XN77-24-20	1-1/2	32	1-1/4	160	102	77	64
1XN77-24-24	1-1/2	40	1-1/2	184	123	106	64
1XN77-32-24	2	40	1-1/2	184	123	106	79


1JC77
ORFS内螺纹 - 直接头 - 短型
ISO 12151-1-SWSA

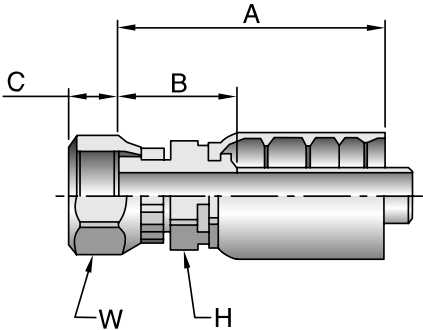

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H mm	 W mm
			DN	inch				
1JC77-8-8	1/2	13/16x16	12	1/2	60	29	22	24
1JC77-10-10	5/8	1x14	16	5/8	70	36	24	30
1JC77-12-12	3/4	1-3/16x12	20	3/4	80	39	30	36
1JC77-16-12	1	1-7/16x12	20	3/4	85	44	36	41
1JC77-16-16	1	1-7/16x12	25	1	91	42	36	41
1JC77-20-16	1-1/4	1-11/16x12	25	1	95	46	41	50
1JC77-32-32	2	2-1/2x12	50	2	143	73	65	75

PDF Compressor Free Version


1JS77
ORFS内螺纹 - 直接头 - 加长型
ISO 12151-1-SWSB

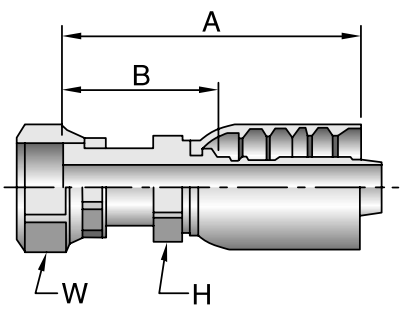

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H mm	 W mm
			DN	inch				
1JS77-6-8	3/8	11/16x16	12	1/2	68	37	22	22
1JS77-8-8	1/2	13/16x16	12	1/2	71	40	22	24
1JS77-10-8	5/8	1x14	12	1/2	75	44	24	30
1JS77-10-10	5/8	1x14	16	5/8	82	47	24	30
1JS77-12-8	3/4	1-3/16x12	12	1/2	80	49	30	36
1JS77-12-10	3/4	1-3/16x12	16	5/8	85	51	30	36
1JS77-12-12	3/4	1-3/16x12	20	3/4	93	52	30	36
1JS77-12-16	3/4	1-3/16x12	25	1	106	57	36	36
1JS77-16-12	1	1-7/16x12	20	3/4	99	58	36	41
1JS77-16-16	1	1-7/16x12	25	1	106	57	36	41
1JS77-16-20	1	1-7/16x12	32	1-1/4	120	62	46	41
1JS77-20-16	1-1/4	1-11/16x12	25	1	109	60	41	50
1JS77-20-20	1-1/4	1-11/16x12	32	1-1/4	121	64	46	50
1JS77-24-24	1-1/2	2x12	40	1-1/2	130	69	60	60
1JS77-32-32	2	2-1/2x12	50	2	160	89	65	75

PDF Compressor Free Version


1J777
ORFS内螺纹 - 45° 接头
ISO 12151-1-SWE45°

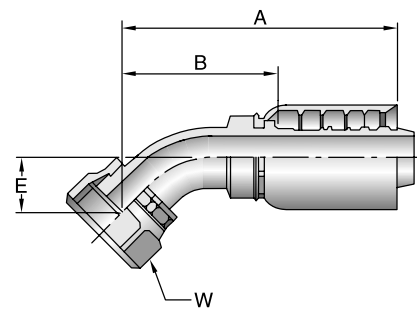

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
1J777-8-8	1/2	13/16x16	12	1/2	73	42	15	24
1J777-10-8	5/8	1x14	12	1/2	76	45	16	30
1J777-10-10	5/8	1x14	16	5/8	83	49	16	30
1J777-12-12	3/4	1-3/16x12	20	3/4	111	70	21	36
1J777-16-16	1	1-7/16x12	25	1	122	72	24	41
1J777-20-20	1-1/4	1-11/16x12	32	1-1/4	156	98	25	50
1J777-24-20	1-1/2	2x12	32	1-1/4	157	100	27	60
1J777-24-24	1-1/2	2x12	40	1-1/2	191	131	42	60

PDF Compressor Free Version


1J977
ORFS内螺纹 - 90°接头 - 短型
ISO 12151-1-SWES90°

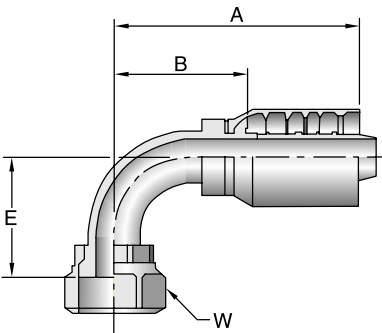

# 型号	 螺纹 UNF		 软管内径 I.D.		A	B	E	 W
			DN	inch	mm	mm	mm	mm
1J977-8-8	1/2	13/16x16	12	1/2	71	40	29	24
1J977-10-8	5/8	1x14	12	1/2	71	40	32	30
1J977-10-10	5/8	1x14	16	5/8	82	47	32	30
1J977-12-8	3/4	1-3/16x12	12	1/2	71	40	48	36
1J977-12-10	3/4	1-3/16x12	16	5/8	82	47	48	36
1J977-12-12	3/4	1-3/16x12	20	3/4	108	66	48	36
1J977-16-12	1	1-7/16x12	20	3/4	107	66	56	41
1J977-16-16	1	1-7/16x12	25	1	120	71	56	41
1J977-16-20	1	1-7/16x12	32	1-1/4	143	85	56	41
1J977-20-16	1-1/4	1-11/16x12	25	1	120	70	64	50
1J977-20-20	1-1/4	1-11/16x12	32	1-1/4	158	100	64	50
1J977-24-24	1-1/2	2x12	40	1-1/2	162	102	69	60

PDF Compressor Free Version


1J177
ORFS内螺纹 - 90°接头 - 加长型
ISO 12151-1-SWEL90°

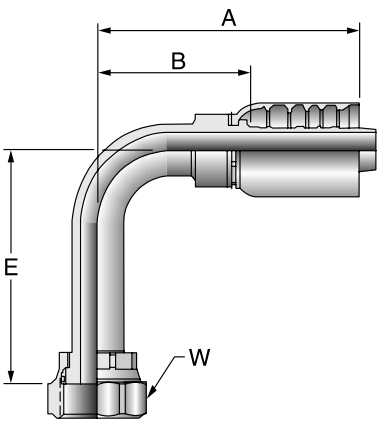

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
1J177-8-8	1/2	13/16x16	12	1/2	71	40	64	24
1J177-10-10	5/8	1x14	16	5/8	82	47	70	30
1J177-12-10	3/4	1-3/16x12	16	5/8	82	47	96	36
1J177-12-12	3/4	1-3/16x12	20	3/4	107	66	96	36
1J177-16-12	1	1-7/16x12	20	3/4	107	66	114	41
1J177-16-16	1	1-7/16x12	25	1	120	71	114	41
1J177-20-16	1-1/4	1-7/16x12	25	1	120	71	129	50
1J177-20-20	1-1/4	1-11/16x12	32	1-1/4	160	102	129	50

PDF Compressor Free Version


1J077
ORFS外螺纹带O形圈 - 直接头
ISO 12151-1-S

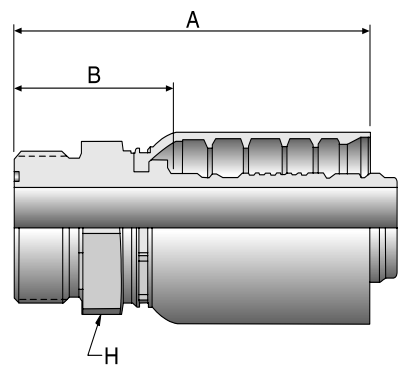

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H mm
			DN	inch			
1J077-8-8	1/2	13/16x16	12	1/2	66	35	22
1J077-10-8	5/8	1x14	12	1/2	71	40	27
1J077-10-10	5/8	1x14	16	5/8	76	41	30
1J077-12-10	3/4	1-3/16x12	16	5/8	79	45	30
1J077-12-12	3/4	1-3/16x12	20	3/4	88	47	32
1J077-16-12	1	1-7/16x12	20	3/4	93	51	41
1J077-16-16	1	1-7/16x12	25	1	103	53	41
1J077-20-16	1-1/4	1-11/16x12	25	1	105	55	50
1J077-20-20	1-1/4	1-11/16x12	32	1-1/4	115	58	50
1J077-24-20	1-1/2	2x12	32	1-1/4	119	62	60

PDF Compressor Free Version


10177
NPTF外螺纹 - 直接头
SAE J476A / J516 - AGN

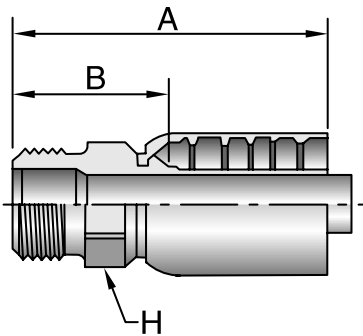

# 型号	 螺纹 NPTF	 软管内径 I.D.		A mm	B mm	 H mm
		DN	inch			
10177-8-8	1/2x14	12	1/2	64	38	22
10177-8-12	1/2x14	20	3/4	87	46	30
10177-12-12	3/4x14	20	3/4	87	46	30
10177-16-16	1x11-1/2	25	1	103	53	36
10177-20-20	1-1/4x11-1/2	32	1-1/4	116	58	46
10177-24-24	1-1/2x11-1/2	40	1-1/2	124	64	50
10177-32-32	2x11-1/2	50	2	143	73	65

PDF Compressor Free Version

10377
JIC 37°锥外螺纹 - 直接头
ISO 12151-5

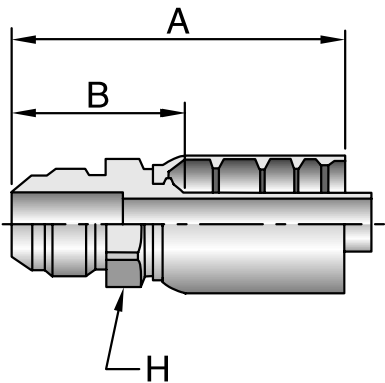


# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H mm
			DN	inch			
10377-8-8	1/2	3/4x16	12	1/2	66	35	22
10377-10-8	5/8	7/8x14	12	1/2	69	38	24
10377-10-10	5/8	7/8x14	16	5/8	76	42	24
10377-12-10	3/4	1-1/16x12	16	5/8	82	48	30
10377-12-12	3/4	1-1/16x12	20	3/4	90	48	30
10377-16-12	1	1-5/16x12	20	3/4	94	52	36
10377-16-16	1	1-5/16x12	25	1	101	52	36
10377-20-16	1-1/4	1-5/8x12	25	1	110	61	50
10377-20-20	1-1/4	1-5/8x12	32	1-1/4	118	61	50
10377-32-32	2	2-1/2x12	50	2	148	78	65

PDF Compressor Free Version

10677

JIC 37°锥内螺纹 - 直接头

ISO 12151-5

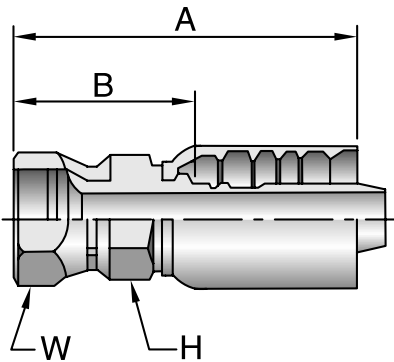


# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H inch	 W inch
			DN	inch				
10677-8-8	1/2	3/4x16	12	1/2	71	40	22	22
10677-10-10	5/8	7/8x14	16	5/8	81	47	24	27
10677-12-12	3/4	1-1/16x12	20	3/4	94	52	30	32
10677-16-16	1	1-5/16x12	25	1	106	56	36	41
10677-20-20	1-1/4	1-5/8x12	32	1-1/4	124	66	46	50
10677-24-24	1-1/2	1-7/8x12	40	1-1/2	136	75	50	60
10677-32-32	2	2-1/2x12	50	2	160	90	65	75

13777

JIC 37°锥内螺纹 - 45°接头

ISO 12151-5

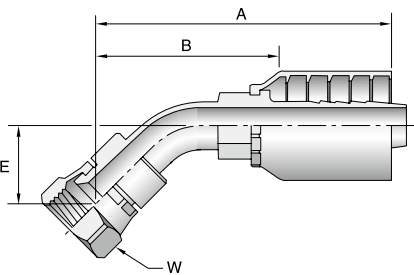


# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
13777-8-8	1/2	3/4x16	12	1/2	73	41	15	22
13777-10-10	5/8	7/8x14	16	5/8	86	52	16	27
13777-12-12	3/4	1-1/16x12	20	3/4	111	69	21	32
13777-16-16	1	1-5/16x12	25	1	122	72	24	41
13777-20-20	1-1/4	1-5/8x12	32	1-1/4	163	105	32	50

PDF Compressor Free Version

13977**JIC 37°锥内螺纹 - 90°接头**


ISO 12151-5

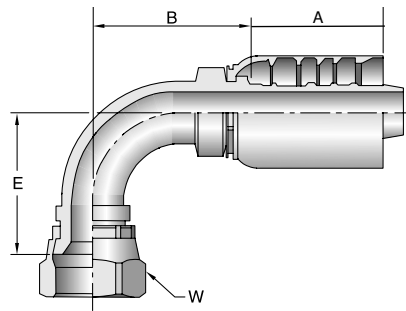

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	E mm	 W mm
			DN	inch				
13977-8-8	1/2	3/4x16	12	1/2	71	39	29	22
13977-10-10	5/8	7/8x14	16	5/8	82	47	32	27
13977-12-12	3/4	1-1/16x12	20	3/4	107	66	48	32
13977-16-16	1	1-5/16x12	25	1	120	70	74	41
13977-20-20	1-1/4	1-5/8x12	32	1-1/4	160	102	78	50
13977-24-24	1-1/2	1-7/8x12	40	1-1/2	184	123	86	60
13977-32-32	2	2-1/2x12	50	2	222	152	140	75

10577**SAE外螺纹带O形圈 - 直接头**

ISO 11926

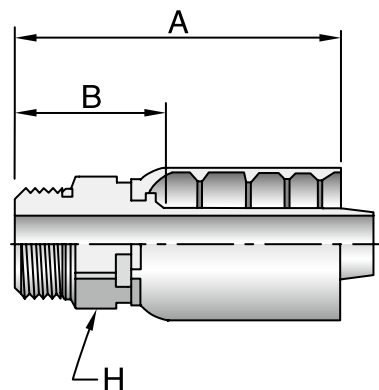

# 型号	 螺纹 UNF		 软管内径 I.D.		A mm	B mm	 H mm
			DN	inch			
10577-8-8	3/4x16		12	1/2	61	30	22
10577-12-12	1-1/16x12		20	3/4	81	39	32
10577-16-16	1-5/16x12		25	1	95	45	41
10577-20-20	1-5/8x12		32	1-1/4	106	48	50